



INSTALLATION INSTRUCTIONS

GRILL/ BRUSH GAURD PART #6051
2006-2007 HONDA PILOT

PARTS LIST

- | | |
|----------------------------|-------------------------|
| (1) FRONT BAR | (12) 7/16" FLAT WASHERS |
| (2) FRAME MOUNT BRACKETS | (6) 7/16" HEX LOCK NUTS |
| (2) TOP SUPPORT BRACKETS | (2) 1/4" x 3/4" SCREWS |
| (6) 7/16 x 1 1/4 HEX BOLTS | (4) 5/16 HEX BOLTS |
| (2) 5/16 NUT PLATES | (4) 5/16 WASHERS |


PROCEDURE

1. Remove the plastic rivets securing the plastic guard located underneath the vehicle in order to install the front bar.
2. Start with the passenger side assembly, position the passenger side bracket and align bracket with the three factory bolts on the frame. Fasten the frame brackets to the bottom of the frame as shown in the illustration using the factory existing bolts. Note: Attach bracket between frame and support on these two existing bolts only.
3. Open hood and remove the rivets securing the top plastic trim panel and remove the trim panel (temporarily) from the vehicle.
4. Attach top bracket support to the cross support existing hole using the 5/16 nut plate and 5/16 x 3/4 hex bolt and 5/16 washer as shown in illustration.
5. Using a utility knife, carefully cut slots on the plastic guard underneath the vehicle to fit around the frame brackets.
6. Re-attach the plastic guard
7. Attach front bar assembly to the lower brackets (inner edge) using the 7/16 x 1-1/4" hex bolts, 7/16 hex nuts, washers, and the top support bracket using the 1/4 x 3/4 screws, hex nuts, and washers.
8. Align front bar assembly with front of vehicle and secure all fasteners.

SEE DIAGRAM BELOW

CUSTOMER SERVICE 888-800-ARIES

2003-05 HONDA PILOT

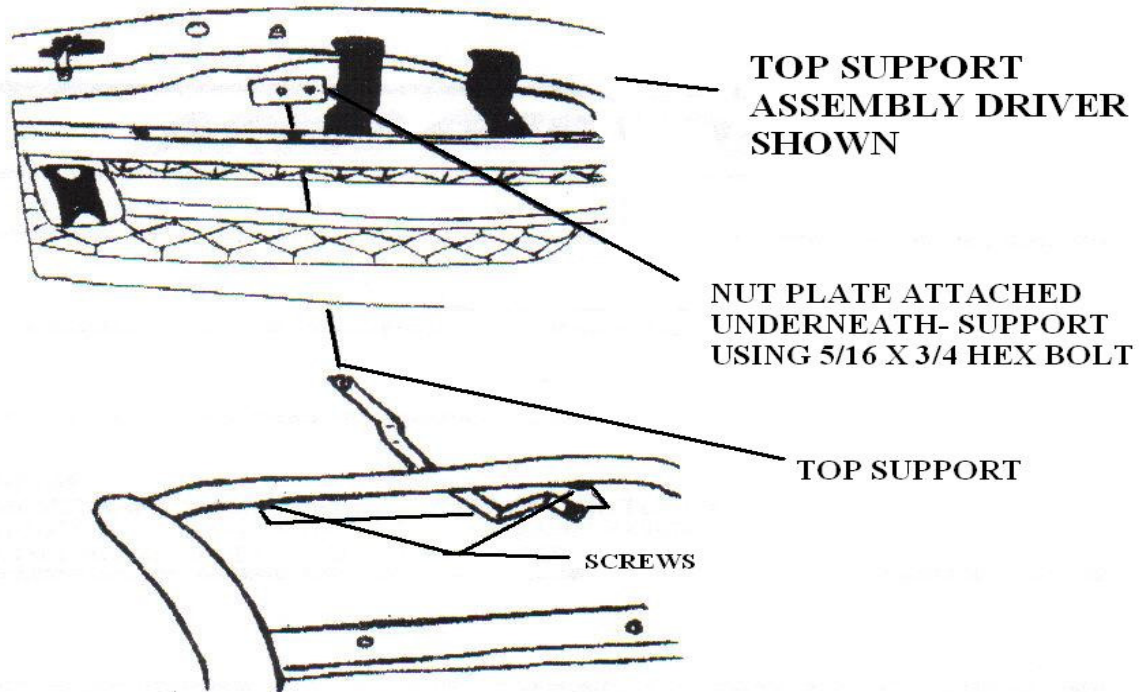

PASSENGER SIDE SHOWN

