



102 S. Michigan Ave., Coldwater, MI 49036

Phone: 517-279-2135

Web/live chat: [www.bds-suspension.com](http://www.bds-suspension.com)

E-mail: [tech@bds-suspension.com](mailto:tech@bds-suspension.com)

Part#: **022624, 022402**

Product: **4" & 6" High Clearance Suspension System**

Application: **2012 Dodge 1500 4WD**

---

## READ AND UNDERSTAND ALL INSTRUCTIONS AND WARNINGS PRIOR TO INSTALLATION OF SYSTEM AND OPERATION OF VEHICLE.

---

**SAFETY WARNING** BDS Suspension Co. recommends this system be installed by a professional technician. In addition to these instructions, professional knowledge of disassembly/ reassembly procedures and post installation checks must be known.

**PRODUCT SAFETY WARNING** Certain BDS Suspension products are intended to improve off-road performance. Modifying your vehicle for off-road use may result in the vehicle handling differently than a factory equipped vehicle. Extreme care must be used to prevent loss of control or vehicle rollover. Failure to drive your modified vehicle safely may result in serious injury or death. BDS Suspension Co. does not recommend the combined use of suspension lifts, body lifts, or other lifting devices.

You should never operate your modified vehicle under the influence of alcohol or drugs. Always drive your modified vehicle at reduced speeds to ensure your ability to control your vehicle under all driving conditions. Always wear your seat belt.

### PRE-INSTALLATION NOTES

1. Special literature required: OE Service Manual for model/year of vehicle. Refer to manual for proper disassembly/ reassembly procedures of OE and related components.
2. Adhere to recommendations when replacement fasteners, retainers and keepers are called out in the OE manual.
3. Larger rim and tire combinations may increase leverage on suspension, steering, and related components. When selecting combinations larger than OE, consider the additional stress you could be inducing on the OE and related components.
4. Post suspension system vehicles may experience drive line vibrations. Angles may require tuning, slider on shaft may require replacement, shafts may need to be lengthened or trued, and U-joints may need to be replaced.
5. Secure and properly block vehicle prior to installation of BDS Suspension components. Always wear safety glasses when using power tools.
6. If installation is to be performed without a hoist, BDS Suspension Co. recommends rear alterations first.
7. Due to payload options and initial ride height variances, the amount of lift is a base figure. Final ride height dimensions may vary in accordance to original vehicle attitude. Always measure the attitude prior to beginning installation.

### POST-INSTALLATION WARNINGS


1. Check all fasteners for proper torque. Check to ensure for adequate clearance between all rotating, mobile, fixed, and heated members. Verify clearance between exhaust and brake lines, fuel lines, fuel tank, floor boards and wiring harness. Check steering gear for clearance. Test and inspect brake system.
2. Perform steering sweep to ensure front brake hoses have adequate slack and do not contact any rotating, mobile or heated members. Inspect rear brake hoses at full extension for adequate slack. Failure to perform hose check/ replacement may result in component failure. Longer replacement hoses, if needed can be purchased from a local parts supplier.
3. Perform head light check and adjustment.
4. Re-torque all fasteners after 500 miles. Always inspect fasteners and components during routine servicing.

## PARTS LIST

Part #	Qty	Description			
02230	1	Steering Knuckle (drv)	01295	1	Front Crossmember - HC
02231	1	Steering Knuckle (pass)	01296	1	Rear Crossmember - HC
44066	2	Tie Rod End	02002ZP	4	18mm x 150mm bolt
660	1	Bolt Pack - Diff hardware	N18MPT	4	18mm Nut
	3	12mm-1.75 x 30mm bolt	01264	8	Cam Slot Washer
	2	12mm-1.75 x 40mm bolt	01278	2	Preload Spacer 6in kit only
	4	12mm-1.75 x 50mm bolt	01267	2	Strut Spacer - 6in kit or
	13	12mm flat washer	02267	2	Strut Spacer - 4in kit
	4	12mm-1.75 prevailing torque nut	02395	1	Differential Drop Brkt (pass) - frt
	3	1/2"-13 x 1-1/2" bolt	02389	1	Differential Drop Brkt (pass) - rear
	4	1/2"-13 X 1-1/4" bolt	01236	1	Differential Drop Brkt (drv front - outter)
	3	1/2"-13 prevailing torque nut	02278	1	Differential Drop Brkt (drv front - inner)
	10	1/2" SAE thru-hardened washer	02277	1	Differential Drop Brkt (drv rear)
662	1	Bolt Pack - Brake hardware	01499	2	1/4" thick spacers (for diff mount)
	2	1/4"-20 x 1/2" bolt	02242	1	Front Driveshaft Spacer
	2	1/4"-20 prevailing torque nut	01298	1	Differential Skid Plate - HC
	4	1/4" SAE washer	02281	1	Brakeline drop bracket - drv (4in kit)
	2	Wire Clip	02282	1	Brakeline drop bracket - pass(4in kit)
	6	10mm-1.50 Prevailing torque nut	7668	1	Brakeline hardware (4in kit)
	6	10mm flat washer	22531	2	Brake Line (6in kit)
	2	1/2"-13 x 1-1/4" bolt	01274	2	Brake Line Bracket (6in kit)
	2	1/2"-13 prevailing torque nut	5188	2	Brake Line Clip (6in kit)
	4	1/2" SAE flat washer	CCW-03-050	4	Crush Washer (6in kit)
	2	7/16"-14 Nylock nut	342701	2	Loctite
663	1	Bolt Pack - driveshaft spacer	099000	4	Zip Ties
	2	12mm-1.75mm x 45mm bolt	117300006	4	Sway Bar Link Cup Washers
	2	12mm flat washer.	911114	2	Sway bar extension links



# 2012 DODGE RAM 1500 FRONT BOX KIT COMPONENTS

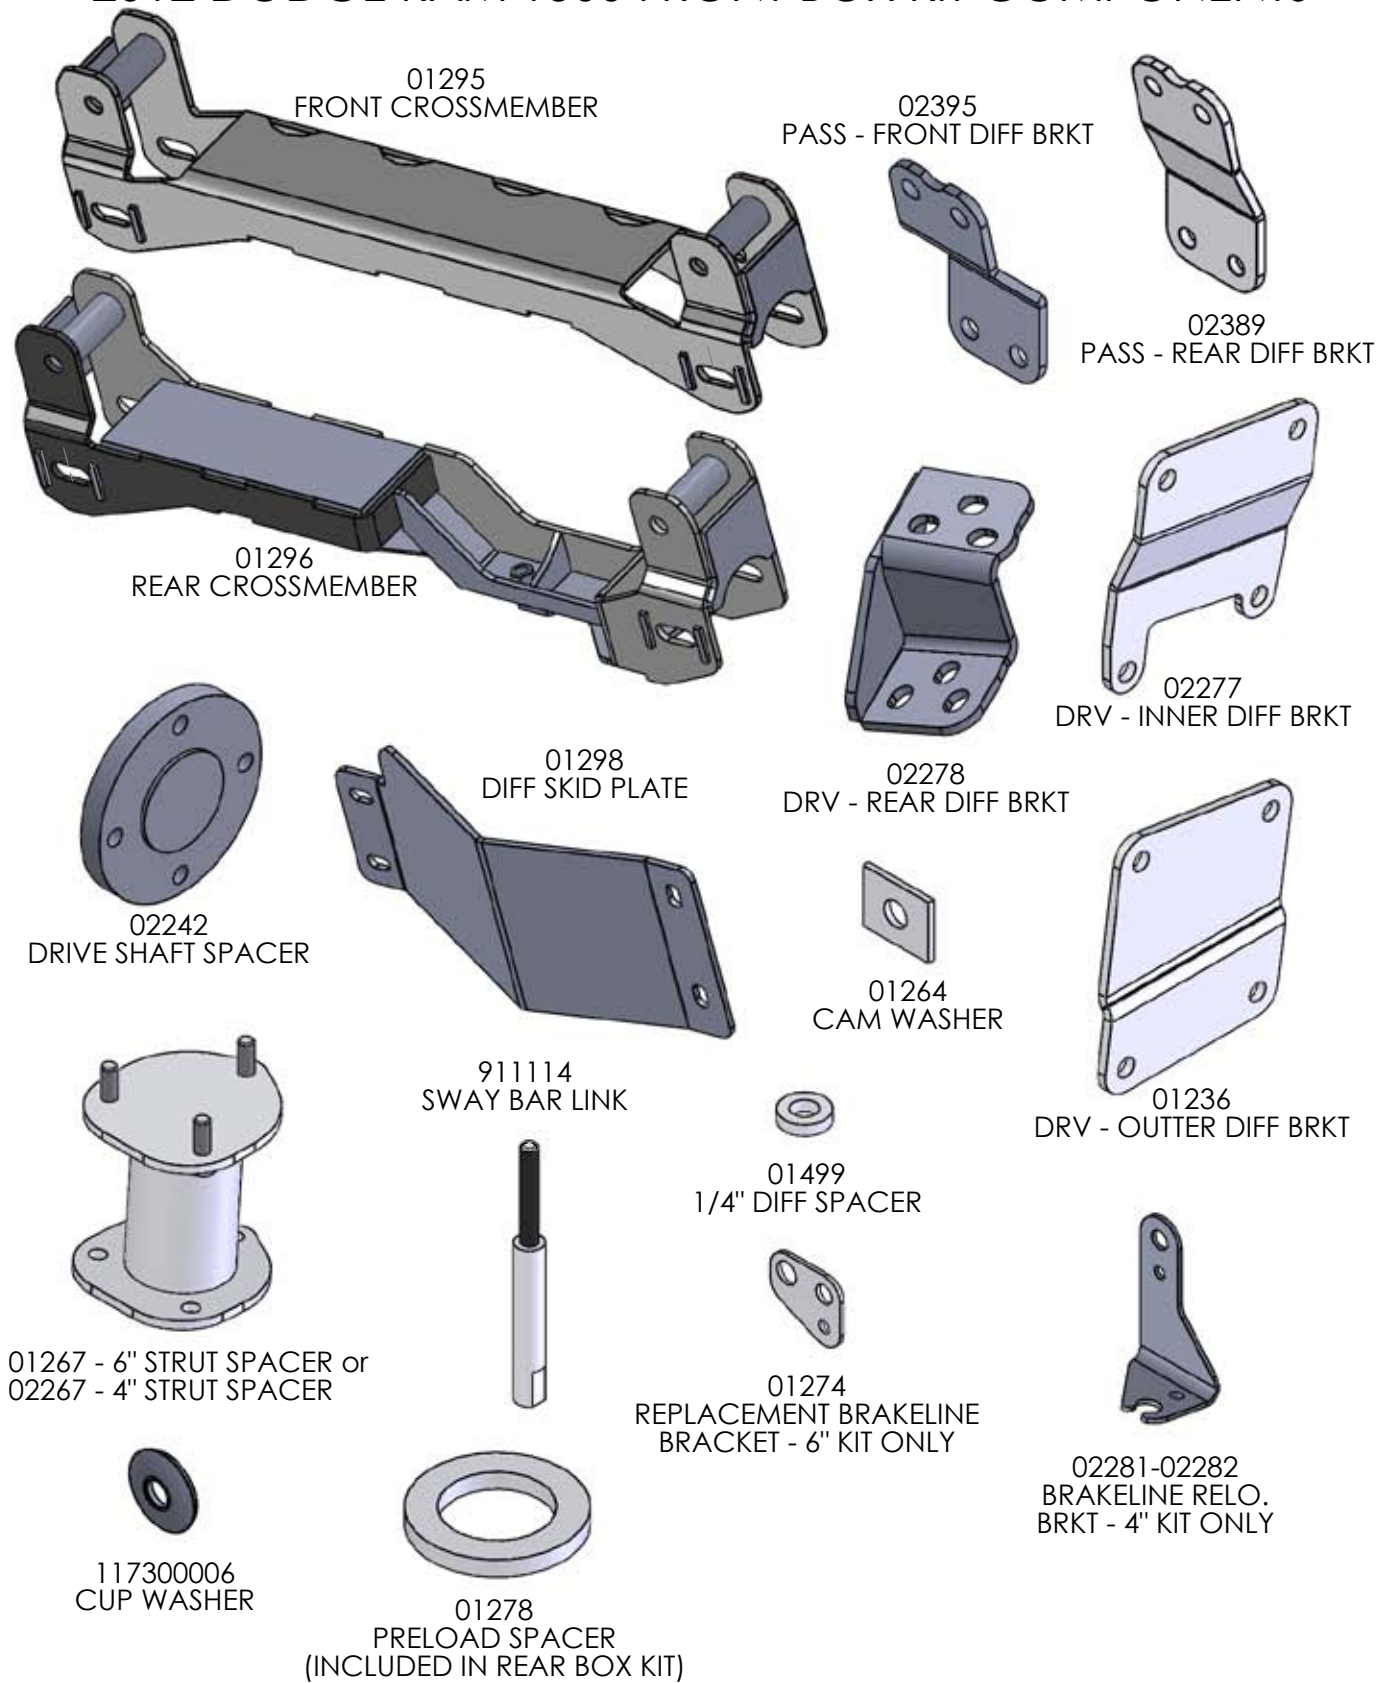

## PRE-INSTALLATION NOTES

- The factory service manual specifically states that striking the knuckle to loosen the ball joints or tie rod ends is prohibited. Striking the aluminum knuckle can damage it. A special puller tool #8677 (or equivalent ball joint tool) is recommended to be used to separate these components from the knuckle.
- On some vehicles an exhaust modification will be required to clear the front driveshaft in its new, lower position.

## PRE-INSTALLATION MEASUREMENTS


Measure from the center of the wheel up to the bottom edge of the wheel opening

LF\_\_\_\_\_ RF\_\_\_\_\_ LR\_\_\_\_\_ RR\_\_\_\_\_

## INSTALLATION INSTRUCTIONS

### Front Installation

1. Park the vehicle on a clean, flat surface and block the rear wheels for safety.
2. Raise the front of the vehicle and support with jack stands under the frame rails.
3. Remove the wheels.
4. Disconnect the sway bar links from the sway bar. Leave them attached to the lower control arm. (Fig 1).

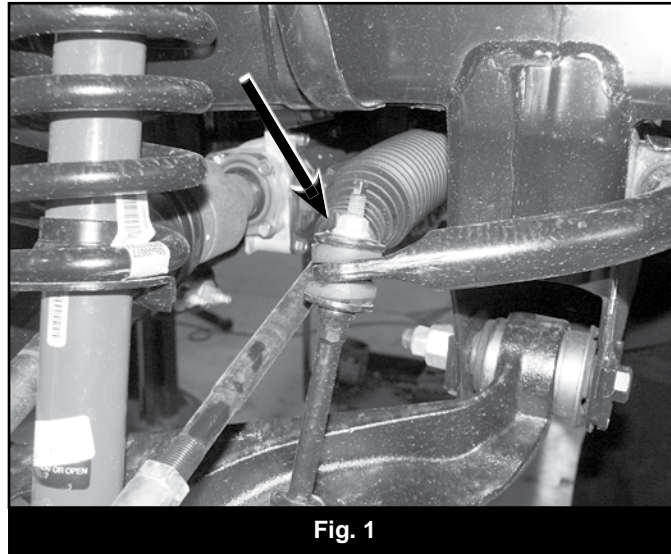

5. Remove and discard the OE front skid plate, if equipped.
6. Disconnect the tie rod ends from the steering knuckles. Remove and retain the mounting nuts. Use the appropriate puller to separate the tie rod end from the steering knuckle. Take care not to damage the tie rod end.
7. Disconnect the ABS brake line at the frame. Remove it from any retaining clips.
8. Steps 9-14 are for 6inch kit with replacement brakelines only: Steps 15-18 are for 4inch kit, which includes brakeline drop brackets. If installing optional brakelines - follow steps 9-14.
9. Disconnect the driver's side front brake hose from the caliper. Retain the banjo bolt and discard the crush washers.
10. 6inch kit only: Disconnect the hard line from the brake hose fitting at the frame. Remove the hose fitting retaining bolt and remove the hose from the vehicle. Retain the hose fitting mounting bolt.
11. 6inch kit only: Attach the provided brake line relocation bracket (01274) to the frame where the original line mounted. Fasten the bracket with the OE fitting bolt through the original threaded hole and the corresponding small hole in the new bracket (Fig 2a). Align the other mounting hole in the bracket with the brake line hole in the frame and fasten with a 1/2" x 1-1/4" bolt, nut and 1/2" SAE washers (BP #631). Torque the OE bolt to 10 ft-lbs and the 1/2" bolt to 50 ft-lbs. Note: The third hole in the bracket should be hanging out past the edge of the frame.



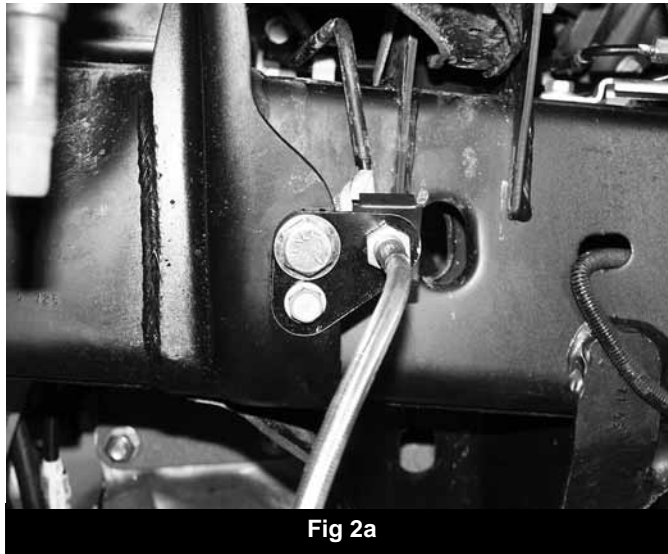



Fig 2a

12. 6inch kit only: Route the new stainless steel brake line through the relocation bracket and attach it to the hard line. Tighten the fitting securely. Fasten the line to the bracket with the provided retaining clip.
13. 6inch kit only: Attach the opposite end of the new brake line to the caliper with the OE banjo bolt and one new crush washer on each side of the fitting. Torque the banjo bolt to 18 ft-lbs.
14. 6inch kit only: Repeat brake line installation on the passenger's side of the vehicle.
15. 4inch kit only: Disconnect the brakeline hardware from the strut tower and pull the brakeline through the mount. Cut a slot to allow the brakeline to be removed from the frame. If you do not wish to cut on the coil bucket, the line can be disconnected and reconnected after it is removed from the frame. If the line is disconnected the brakes must be bled at the end of the installation. (Fig 2b)




Fig. 2b

16. 4inch kit only: Attach the provided brake line relocation bracket to the frame where the original line mounted. The brakeline bracket will offset towards the rear of the vehicle. Torque the factory bolt to 10 ft-lbs and the 1/2" bolt to 50 ft-lbs.
17. 4inch kit only: Carefully reform the hardline to gain additional length. Attach to the relocation bracket with 1/4" hardware (bolt pack #768). (Fig 2c)

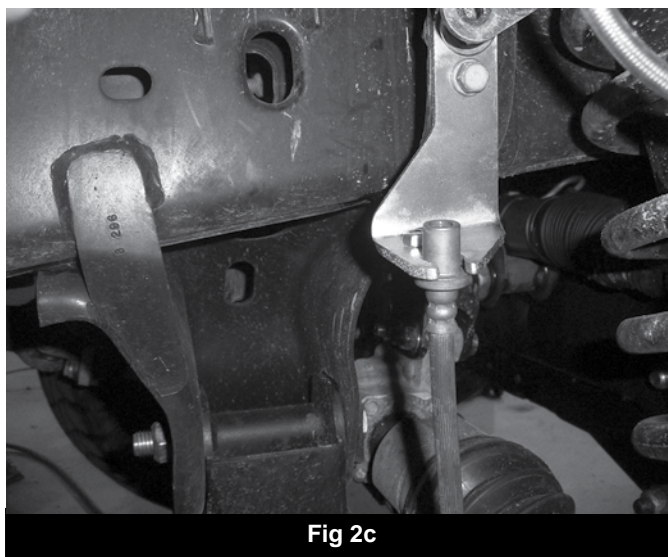

18. 4inch kit only: Repeat brake line relocation bracket installation on the passenger's side of the vehicle
19. Remove the brake caliper anchor bracket bolts and pull the caliper free from the steering knuckle and rotor. Hang the caliper securely out of the way. Retain caliper mounting hardware. Remove the brake rotor from the hub.  
ⓘ Note: Do not allow the brake caliper to hang from the brake hose.
20. Remove the hub axle nut. Retain nut.
21. Loosen but do not remove the lower control arm bolts.
22. Disconnect the CV axles from the differential by carefully prying CV out at the differential to disengage the internal retaining clip. Pry the shaft out just enough to release the clip and leave the axle on the differential at this time.
23. Support the lower control arm with a hydraulic jack. Remove the three strut-to-frame mounting nuts (Fig 3).  
⚠ DO NOT loosen the middle strut nut.

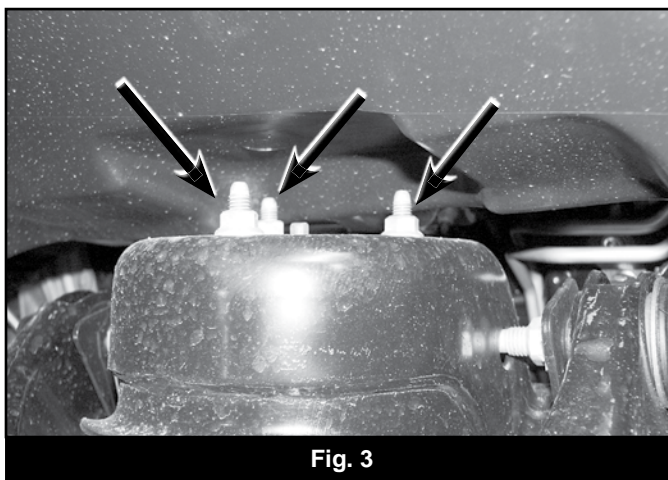

24. Loosen the strut-to-lower control arm hardware (Fig 4). Remove the nut from the bolt and leave the bolt in place to temporarily retain the strut to the lower control arm. Retain the nut.

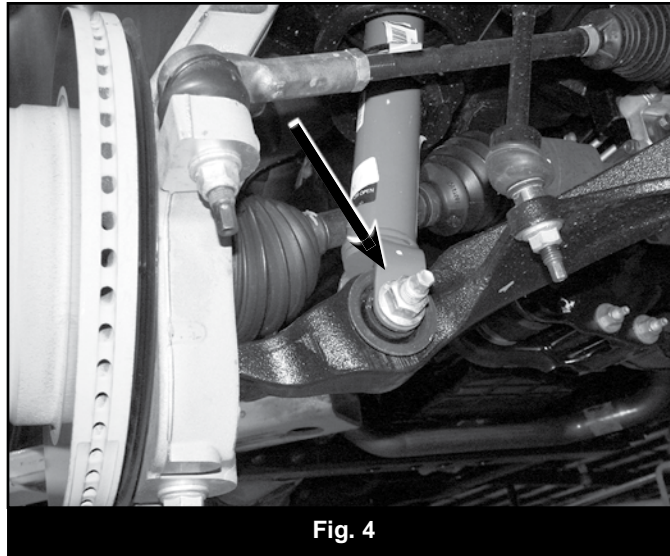


Fig. 4

25. Remove the upper and lower ball joint nuts. Reinstall the nuts a few turns by hand. Separate the upper and lower ball joints from the steering knuckle using the appropriate puller. Take care not to damage the ball joint.
26. Remove the upper ball joint nut. Lower the jack enough to allow removal of the strut. Remove the lower strut bolt and remove the strut from the vehicle. Mark the strut from the appropriate side (driver's or passenger's). Retain mounting bolt and upper ball joint nuts.
27. Continue to lower the jack allowing the knuckle/CV axle and lower control arm to swing down. Slide the CV axle off of the differential. Remove the CV axle from hub.
28. Remove the lower ball joint nut and remove the knuckle from the lower control arm. Retain the lower ball joint nut.
29. Remove the three bolts mounting the hub bearing assembly to the OE steering knuckle. Retain the mounting bolts. Remove the hub assembly and dust shield from the knuckle. Note: It may be necessary to press the hub out of the knuckle as a result of excessive corrosion on some vehicles.
30. Install the hubs in the corresponding new knuckles (01230, 01231) and fasten with the stock mounting bolts (Fig 5). Index the hub so that the ABS line runs out the front side of the knuckle toward the steering arm. Use Loctite on the bolt threads and torque to 125 ft-lbs.




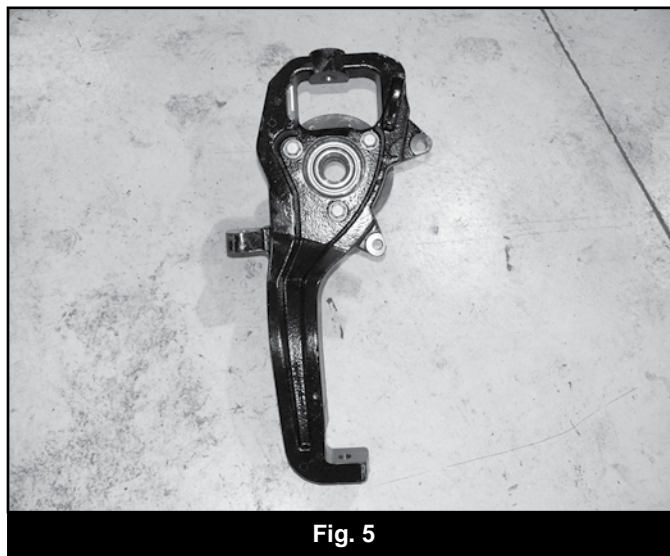


Fig. 5

31. Remove the lower control arms from the frame. Retain hardware.
32. Make indexing marks on the front drive shaft and differential input flange for realignment later. Remove the four bolts and disconnect the drive shaft from the differential. Discard mounting bolts.
33. Remove the four bolts mounting the OE rear crossmember to the frame rails and remove the crossmember from the vehicle. Discard the crossmember and the hardware.

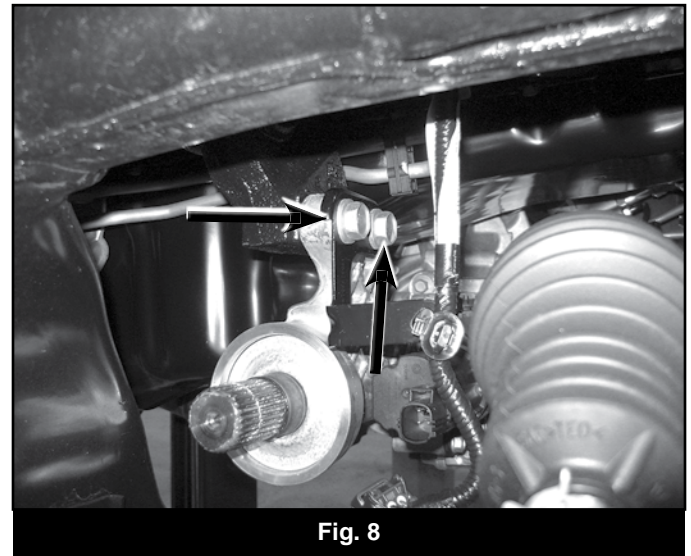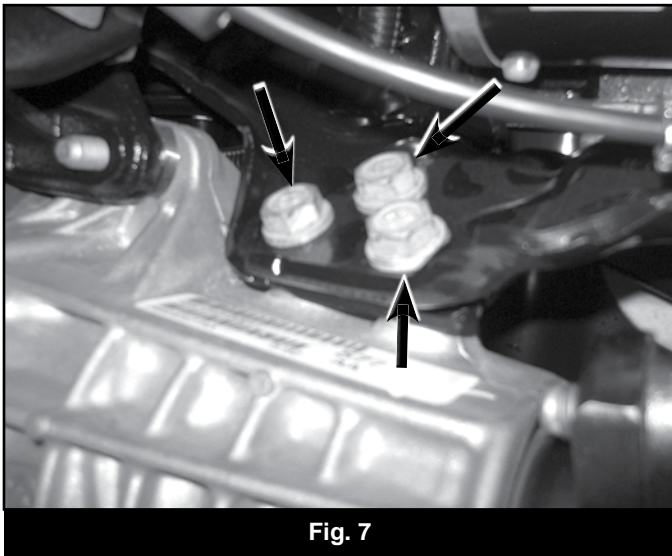

34. Using a jack, support the differential. Loosen and remove the two forward-most differential mounting bolts on the driver's side (Fig 6). Loosen but do not remove the three rear driver's side bolts (Fig 7 ) and the two passenger's side bolts (Fig 8), on the passengers side, remove the differential actuator cable bracket. It will not be reused..

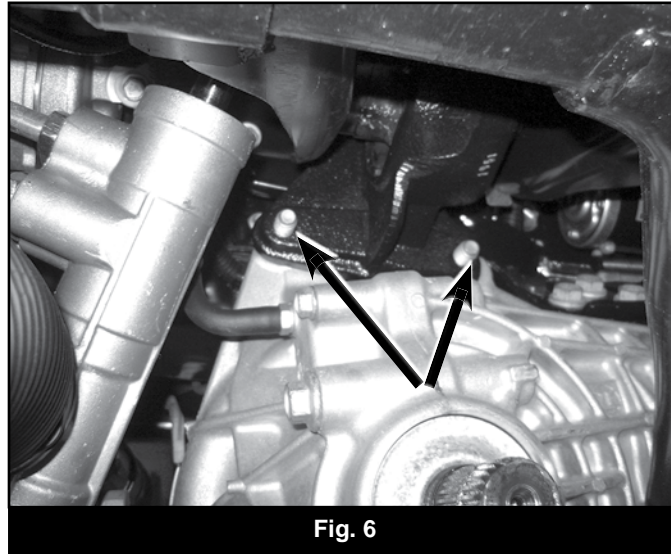

35. With the differential securely supported, remove the remaining bolts and lower the differential from the vehicle.
36. The driver's side rear lower control arm pocket must be trimmed to provide clearance for the differential in its lowered position. Measure inward from the center of the outer OE crossmember mounting hole 1/2" and mark. Repeat on the opposite side of the pocket. Make a continuous line connecting the two marks over the top edge of the pocket. Trim the pocket on the line with a saw-zall or cut off wheel. Paint any exposed metal to prevent corrosion (Fig 9).



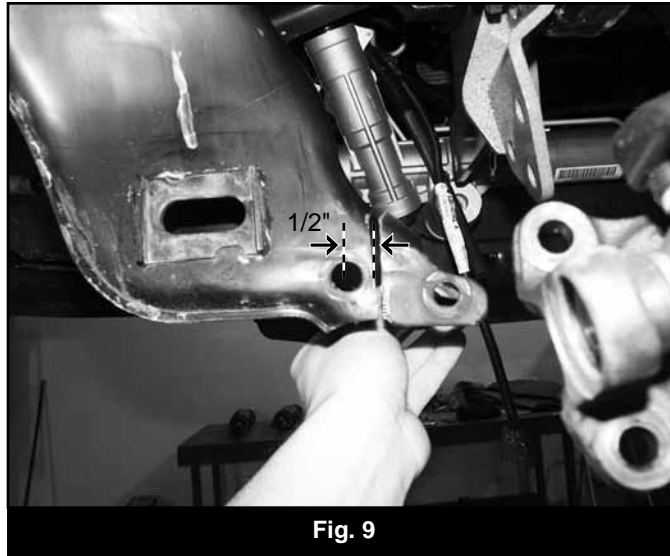


Fig. 9

37. Install the provided passenger's side differential drop brackets (02395 & 02389) to the original frame mount with OE hardware. Stack the brackets together as shown. Leave hardware loose. (Fig. 10)
38. Install the two front driver's side differential drop brackets so that the bracket with the small offset (01236) is toward the outside of the vehicle (offsetting out) and the one with the bigger offset (02278) is on the inside (offsetting in). The brackets should taper down in height as they go toward the rear of the vehicle (for correction of the pinion angle). Fasten the brackets to the frame with two 12mm x 40mm bolts and washers into the factory threaded holes (BP #660). Leave hardware loose. (Fig. 11a / b)



Fig. 10

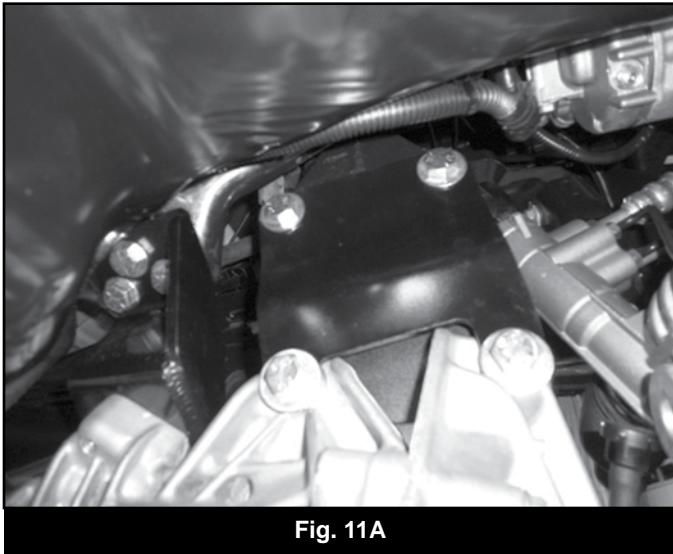


Fig. 11A

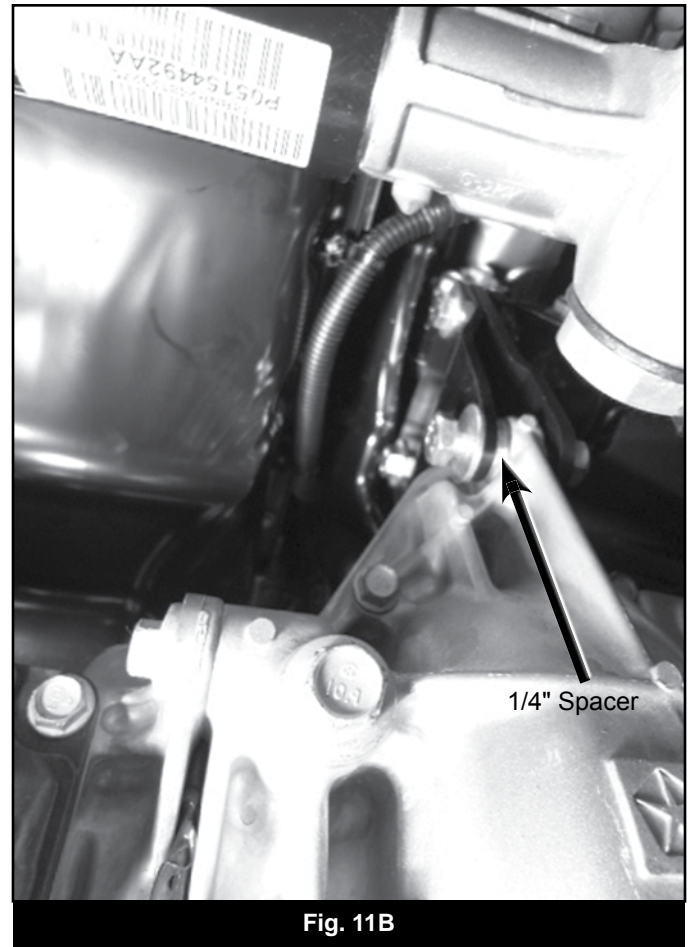


Fig. 11B

39. Install the driver's side rear differential drop bracket (01238) to the frame with three 1/2" x 1-1/2" bolts and 1/2" SAE washers (BP #660). (Fig. 12) The bracket will have the gusset plate towards the front of the vehicle. Leave hardware loose.

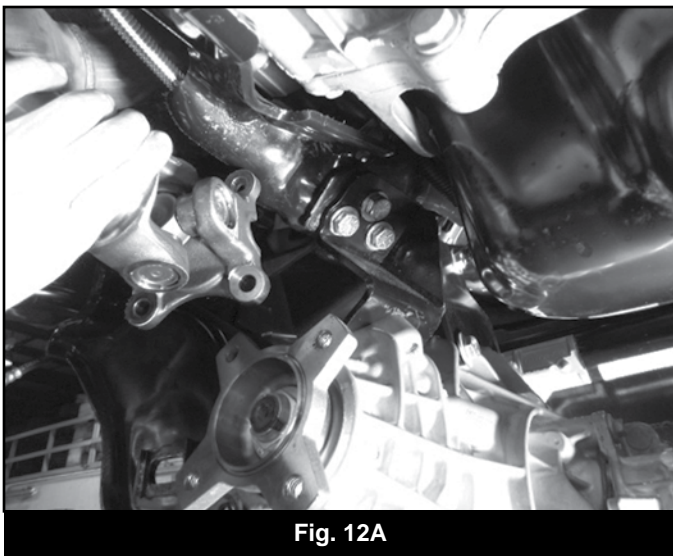


Fig. 12A

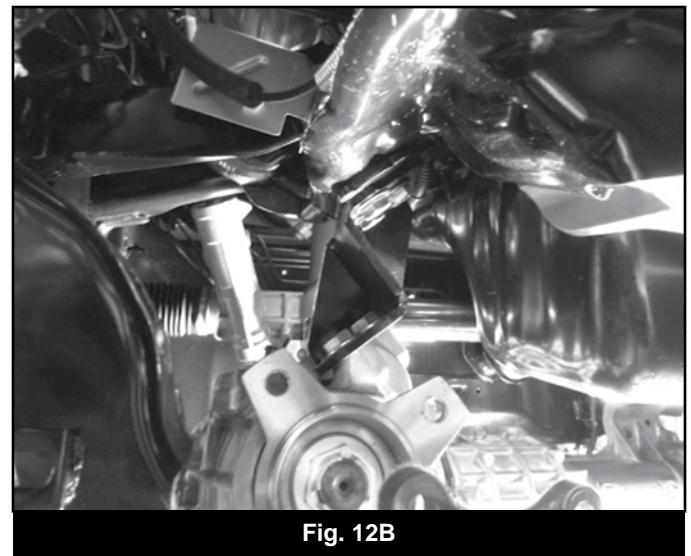


Fig. 12B

40. Using a jack (and an assistant to aid in balancing) raise the differential up to the new brackets.
41. Attach the differential to the driver's side front bracket and Passenger's side bracket with 12mm x 50mm bolts, nuts and washers (BP #660), the drivers side brackets shown in figure 11 will require 1/4" spacers. Attach the drivers side rear bracket to the differential with 12mm x 30mm bolts and washers (BP #660). Leave all differential hardware loose.
42. Torque all 14 differential mounting bolts. Torque the 1/2" hardware to 65 ft-lbs and the 12mm hardware to 50 ft-lbs.

43. Locate the front differential wiring harness. Remove from factory clips to give enough slack to reach the differential. Reattach to differential and tie up extra slack with provided zipties.
44. Install the new front crossmember (01295) in the OE front lower control arm pockets (Fig 13) and loosely fasten with the provided 18mm x 150mm bolts, nuts in conjunction with the provided rectangle cam slot washers (01264). Note: The offset in the crossmember goes to the front, bolts run from front to rear.

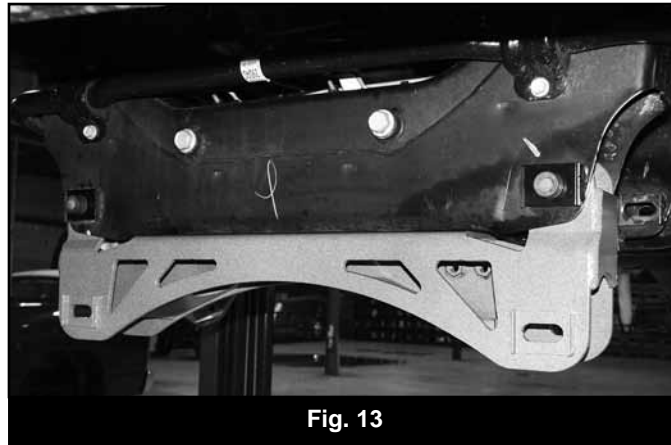


Fig. 13

45. Install the new rear crossmember (01296) in the OE rear lower control arm pockets and loosely fasten with the provided 18mm x 150mm bolts, nuts in conjunction with the provided rectangle cam slot washers (01264). Run the bolts from front to rear and leave loose at this time. (Fig. 14)



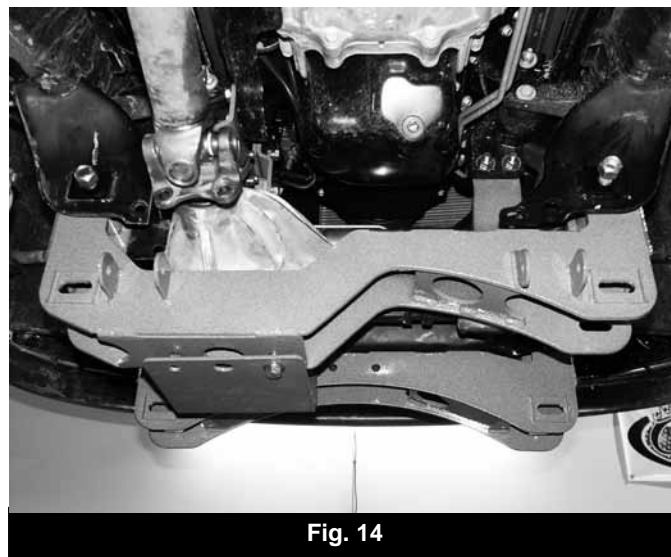


Fig. 14

46. Install the new differential skid plate to the front crossmember with  $\frac{1}{2}$ " x 1-1/4" bolts and  $\frac{1}{2}$ " SAE washers (BP #660) into the welded nuts in the crossmember. Install the back of the skid plate to the rear crossmember with  $\frac{1}{2}$ " x 1-1/4" bolts and  $\frac{1}{2}$ " SAE washers (BP #660) into the welded nuts in the crossmember. Leave hardware loose.
47. Install the lower control arms in the front and rear crossmembers. Attach the control arms to the crossmembers with the OE cam bolts, washers and nuts running from front to rear. Leave hardware loose.
48. With the lower control arms installed, torque the 18mm crossmember mounting bolts to 220 ft-lbs. Torque the  $\frac{1}{2}$ " differential skid plate hardware to 65 ft-lbs.
49. Install the provided drive shaft spacer (02242) on the differential input flange. Attach the front driveshaft to the differential by aligning the marks made earlier. Fasten the driveshaft and spacer to the differential flange with 12mm x 45mm bolts and 12mm washers (BP #663). Use loctite on the bolt threads and torque to 55 ft-lbs.

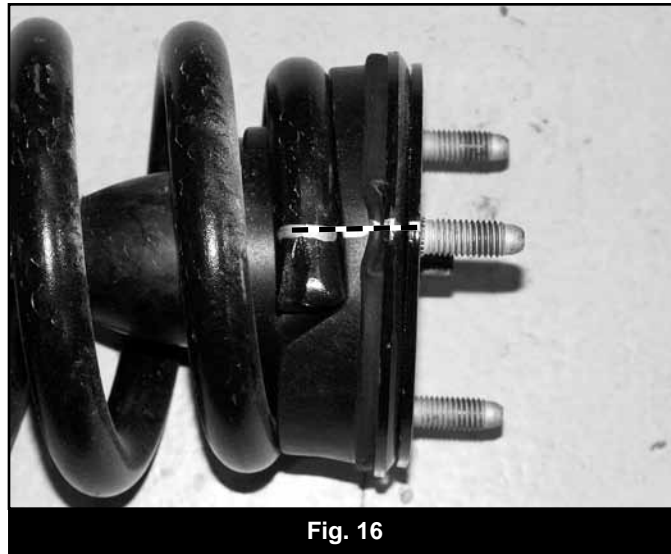


50. Place indexing marks on the strut body, strut cap and upper coil seat (Fig 15, 16) for realignment of the components when the strut is reassembled.

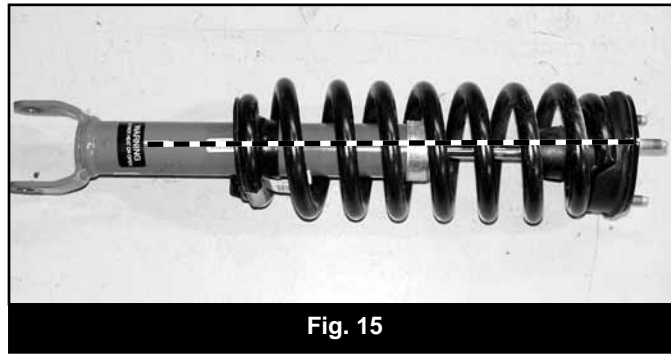

*Caution: Coil spring is under extreme pressure. Improper removal/installation of coil spring could result in serious injury or death. Use only a high-quality spring compressor and carefully read and follow the manufacturer's instructions.*

51. Using an appropriate strut compressor, compress the coil spring and remove the upper strut nut (Fig 17). Remove the strut, strut cap and upper coil seat from the coil spring.

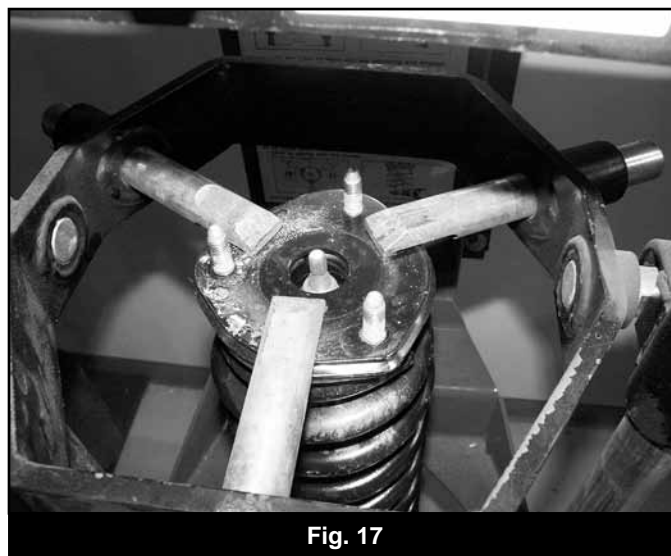

52. Place the provided preload spacer (01278) between the plastic coil seat and the rubber isolator (Fig 18).



53. Reassemble the strut as it was taken apart by aligning the index marks made earlier. Fasten the assembly with the OE strut nut. Torque nut to 50 ft-lbs.
54. 4 inch kit only: Rotate the top of the strut 180 degrees. This will change the position of the coil bow to give enough clearance to the frame rail. Compress the coil slightly to allow the top plate, and only the top plate to rotate around 1/2 turn. This must be done for both strut assemblies.
55. Install the provided strut spacers (01267 - 6in kit or 02267 - 4in kit) on the struts with the original strut mounting hardware. Torque nuts to 30 ft-lbs.
56. Loosely install the strut assemblies on the appropriate sides of the truck with the provided 10mm nuts and washers (BP #811) on the strut spacer studs.
57. Install the new driver's side steering knuckle to the driver's side lower control arm ball joint and loosely attach with the original nut. Install the driver's side CV axle in the hub and loosely fasten with the original axle nut. Swing the knuckle/CV assembly up while aligning the axle with the differential output shaft. Loosely attach the strut to the lower control arm with the original hardware. Push the CV axle all the way onto the differential output to seat the internal retaining clip.
58. Support the lower control arm with a hydraulic jack and attach the knuckle to the upper ball joint with the OE nut.
59. Torque the upper ball joint nut to 55 ft-lbs and the lower ball joint nut to 60 ft-lbs. Torque the axle nut to 185 ft-lbs. Torque the upper strut-to-frame nuts to 30 ft-lbs.
60. Repeat knuckle/CV installation on passenger's side.
61. Install the brake rotor and caliper on the knuckle/hub. Torque the OE caliper bolts to 130 ft-lbs. Use loctite on the caliper bolts.
62. Remove the OE tie rod ends. Trim 1/4" from the male thread on the tie rod end. Take care not to trim too much off from the male threads.
63. Attach the tie rod ends to the new steering knuckles with the included nut. Torque to 55 ft-lbs. Securely lock off the jam nut. It is recommended to have approximately 2 threads left exposed past the jam nut for ease of alignment adjustment.
64. Reconnect the ABS wires at the frame.
65. Route the brake and ABS lines around the back side of the knuckle and use zip ties to secure them out of the way of any moving or rotating parts. Make sure the lines cannot get pinched between the knuckle and the coil spring.
66. Install the sway bar link extension onto the factory sway bar link. Attach the assembly to the sway bar with the factory bushing, new cup washers, and 7/16" nylock nuts (#662) and Loc-tite on threads to attach to the factory sway bar link.. Tighten bolt until bushings begin to deform. It is NOT necessary to over tighten the bolt. Over tightening will cause premature bushing wear.



**Fig. 19**

67. Reinstall front wheels. Torque to OE specifications, see owner's manual.
68. Lower the vehicle to the ground and bounce the front to settle the suspension.
69. Center the lower cams and torque lower control arm hardware to 125 ft-lbs. Torque the strut-to-lower control arm bolt to 125 ft-lbs.
70. If the front brakelines were disconnected or replaced, the front brakes must be bled before driving vehicle.
71. Check all fasteners for proper torque. Recheck all fasteners after 500 miles and at regularly scheduled maintenance intervals.
72. A complete front end alignment is required. Do not drive the vehicle with the steering wheel off center. This can cause unsafe driving conditions.

---

### **NOTICE TO DEALER/INSTALLER**

These instructions, the warning card, and included decals must be given to the owner of this BDS Suspension product.

---

For questions, technical support and warranty issues relating to this BDS Suspension product, please contact your distributor/installer before contacting BDS Suspension directly.

**Sold/Installed by:**