

Product Number: A1450 Application: Jeep TJ 97-Present

SAFETY

Your safety and the safety of others is very important.

- In order to help you make informed decisions about safety, we have provided installation instructions and other information.
- These instructions alert you to potential hazards that could hurt you or others.
- Please do a job safety analysis (JSA) before each task to identify potential hazards for your situation and remove/protect against them.
- You must use your own good judgment, and take your time.

Read and understand all safety precautions and instructions before installing this product.

THIS PRODUCT IS FOR OFFROAD USE ONLY. ALL LIABILITY FOR INSTALLATION AND USE RESTS WITH THE PURCHASER.

CARELESS INSTALLATION AND OPERATION CAN RESULT IN SERIOUS INJURY OR EQUIPMENT DAMAGE.

Injury Hazard

Failure to observe these instructions could lead to severe injury or death.

- **Always** remove jewelry and wear eye protection.
- Always use extreme caution when jacking up a vehicle for work. Set emergency brake and use tire blocks. Locate and use the vehicle manufacturers designated lifting points. Use jack stands.
- Always use appropriate and adequate care in lifting components into place.
- **Always** insure components will remain secure during installation and operation.
- Always wear safety glasses when installing this kit. A drilling operation will cause flying metal chips. Flying chips can cause serious eye injury.
- Always use extreme caution when drilling on a vehicle. Thoroughly inspect the area to be drilled (on both sides of material) prior to drilling, and relocate any objects that may be damaged.
- **Always** use extreme caution when cutting and trimming during fitting.
- **Always** tighten all nuts and bolts securely per installation instructions.
- Always route electrical cables carefully. Avoid moving parts, components that become hot and rough or sharp edges.
- **Always** insulate and protect all exposed wiring and electrical terminals.
- Always perform regular inspections and maintenance on mounts and related hardware.



Page 1 of 8



Product Number: A1450 Application: Jeep TJ 97-Present

I. Overview

Congratulations on your new purchase of the industries' best and most stylish Jeep Bumper! This bumper has been **engineered** for strength while keeping the weight down.

Your bumper was designed in 3-D from digitized data, CNC laser cut, fabricated, and powder coated... all in the U.S.A.

Enjoy the fit and finish of a quality Jeep Bumper from Fab Fours Inc.





Page 2 of 8

A1450



II. Parts List

Installation Instructions Jeep Hardcore Bumper

Product Number: A1450 Application: Jeep TJ 97-Present

III. Tools Required

□ 10mm Socket

□ T55 Torx bit/Socket



Page 3 of 8

A1450

Socket wrench3/4" Socket




Product Number: A1450 Application: Jeep TJ 97-Present

IV. <u>Vehicle Preparation</u>

- **A**) Disconnect factory fog lamp assembly
- B) Remove 6 T55 torx bolts holding factory bumper to frame. Three per side, two on the top and one on the bottom (retain two shorter bottom torx bolts for new bumper installation). (Picture #1 & #2)



Picture #1: Bumper Top

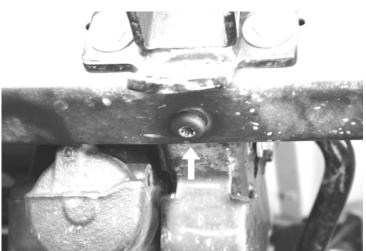

Picture #2: Bumper Bottom



Page 4 of 8



Installation Instructions Jeep Hardcore Bumper Product Number: A1450


Application: Jeep TJ 97-Present

C) Remove factory bumper. (Picture #3).



Picture #3: Front Bumper (shown w/o sway bar cover)

D) Remove sway bar cover, four 10mm bolts; two per side. (Picture #4)

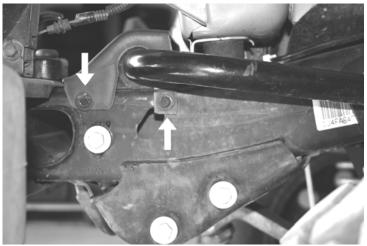

Picture #4



Page 5 of 8

A1450



Product Number: A1450 Application: Jeep TJ 97-Present


V. Jeep Lifestyle Bumper Installation

- □ A) Slide bumper over frame and align mounting locations.
- □ B) Install OEM torx bolts to bottom of frame, do not tighten fully. Repeat for other side.



Picture #5

□ C) Install two 3/4" bolts w/ washers (#3, #4) through top of bumper and into frame. (Picture #6)

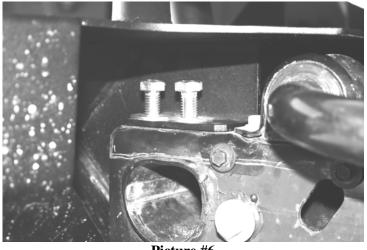

Picture #6

D Verify alignment and tighten all bolts.



Page 6 of 8



Product Number: A1450 Application: Jeep TJ 97-Present

VI. Maintenance/Care

- Periodically check and tighten any nuts that appear to be loose
- □ Stripped, fractured, or bent bolts or nuts need to be replaced.

VII. Contact Information

Fab Fours Inc. 10424 Rodney St Charlotte, NC 28134

Phone	(866)-385-1905
Fax	(866)-574-1424
Email	Support@fabfours.com



More than expected... Better than expected



Page 7 of 8



Installation Instructions Jeep Hardcore Bumper Product Number: A1450

Application: Jeep TJ 97-Present



Page 8 of 8