

E4-WM5-Y698A00

MOUNTING INSTRUCTION



IMPORTANT! READ THIS FIRST!

Installation of shock absorbers or other suspension components requires special tools and expert knowledge. Accordingly, installation of all BILSTEIN products must be performed by a professional automotive suspension technician.

When replacing other brands, BILSTEIN shock absorbers or other suspension components should always be installed as a set. All BILSTEIN products must only be used for the specific, intended application as indicated in the application guide. **Any use of any BILSTEIN product other than for its intended use may result in serious bodily injury or death.**

Always use a chassis hoist for the installation of BILSTEIN products and make certain that the raised vehicle is securely attached to the hoist and/or supported to prevent the vehicle from slipping, falling, or moving during the installation process.

If you install any BILSTEIN product without the necessary special tools, expertise, and chassis hoist, you may subject yourself to the risk of serious bodily injury or death.

BILSTEIN shock absorbers are gas-filled and are highly pressurized.

- Never place any BILSTEIN shock absorbers in a vise or use a clamp on any BILSTEIN shock absorber.
- Never apply heat near any BILSTEIN shock absorber.
- Never attempt to open or repair any BILSTEIN product, in order to prevent **serious bodily injury or death.**

Any attempt to misuse, misapply, modify, or tamper with any BILSTEIN suspension product voids any warranty and **may result in serious bodily injury or death.**

While installing any BILSTEIN product:

- Do not use impact tools for loosening or tightening fasteners, because this may destroy the screw threads.
- Self-locking fasteners must only be used **once!**
- Reuse original equipment components only if they are in good condition, otherwise replace them with new components.
- Never remove the slight film of oil on the shock absorber piston rod and seal.
- All mounting fasteners for shock absorbers and other suspension components must be securely tightened before tension is placed on the suspension system, unless otherwise specified in the manufacturer's service manual or in this instruction.

After installing any BILSTEIN product:

- The suspension caster and camber must be checked and/or adjusted to comply with the vehicle manufacturer's specifications.
- The (load dependent) brake compensator and the anti-lock brake system must be checked and/or reset to comply with the vehicle manufacturer's specifications.
- The headlight aim must be checked and adjusted.

CAUTION for COILOVER TYPE SUSPENSIONS!!!

If disassembling a coilover type suspension, refer to the vehicle manufacturer's service manual for proper procedures. The coil spring is preloaded and must be compressed with a spring compressor to release load before the upper mount is disassembled. Failure to follow the vehicle manufacturer's procedures may cause serious injury or death, and may damage the vehicle.

IMPORTANT!!!

This BILSTEIN product may or may not be compatible with non-BILSTEIN aftermarket products and/or vehicle modifications. It is the responsibility of the professional automotive suspension technician performing the installation to identify any non-OEM components and/or modifications on the vehicle that may interact with the suspension system. These must be evaluated for any potential physical static or dynamic interference with and/or effect on the function of this BILSTEIN product.


E4-WM5-Y698A00 MOUNTING INSTRUCTION





IMPORTANT:

PLACE CIRCLIP IN APPROPRIATE GROOVE TO ADJUST RIDE HEIGHT.

Use appropriate tools to move the circlip. Ensure that the circlip is fully seated in the groove after moving it (you should be able to rotate it manually in the groove). Install the spring seat and, if applicable, spring seat adapter in the direction shown only. The circlip must fit completely in the groove inside the spring seat or spring seat adapter (DETAIL A and B). **Improper installation will cause permanent damage to the shock!**

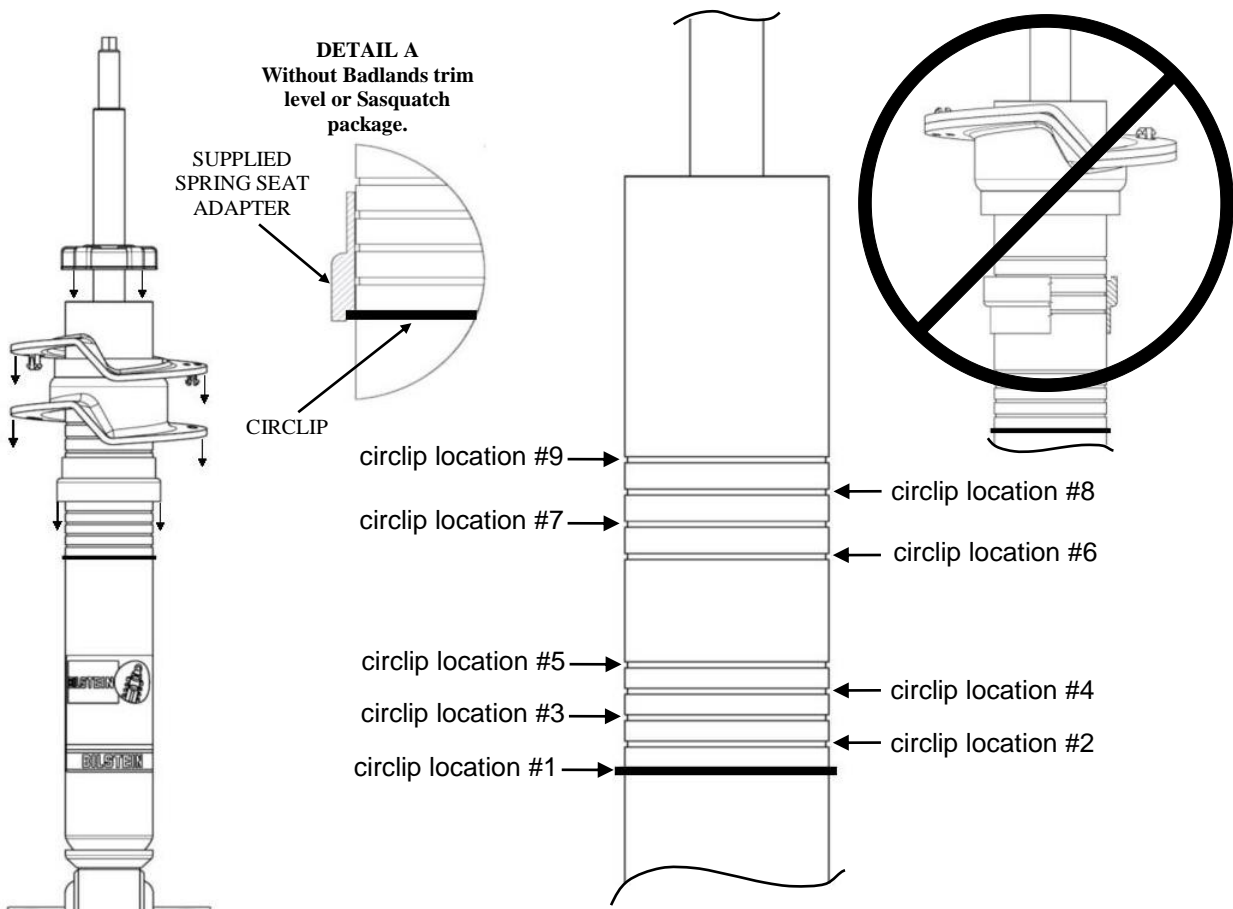


DETAIL A
Without Badlands trim level or Sasquatch package.

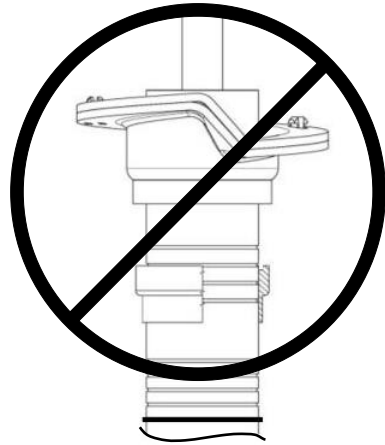

Damper components depicted above are without Badlands trim level or Sasquatch package

DETAIL B
Badlands trim level or Sasquatch package.

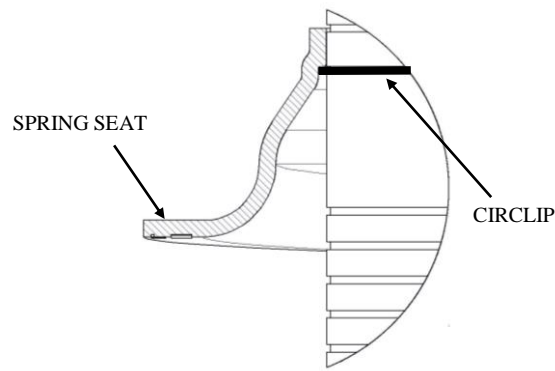

E4-WM5-Y698A00 MOUNTING INSTRUCTION



B8 5100 Typical Lift Heights**			
Circlip Location	Without Sasquatch package Vehicles NOT equipped with factory yellow Bilstein ESCV shocks.	Badlands trim level Note: Do not use supplied spring seat adapter.	With Sasquatch package Note: Do not use supplied spring seat adapter.
#9	Do not use	2.0"	1.7"
#8	Do not use	1.5"	1.2"
#7	Do not use	0.9"	0.6"
#6	Do not use	0.3"	Stock
#5	2.9"	Do not use	Do not use
#4	2.4"	Do not use	Do not use
#3	2"	Do not use	Do not use
#2	1.5"	Do not use	Do not use
#1	1"	Do not use	Do not use

DO NOT USE CIRCLIP SETTINGS THAT ARE NOT RECOMMENDED FOR YOUR VEHICLE.


** Ride heights indicated are typical. Actual ride height is influenced by which factory suspension the vehicle is equipped with and its condition; optional equipment and accessories on your vehicle, and other vehicle modifications such as replacement coil springs, wheel and tire combinations, etc. Modifying/lifting the suspension to your vehicle may raise its center of gravity and may make it more susceptible to loss of control and/or rollover, which may result in death or serious injury. We strongly recommend that you offset the loss of rollover resistance as much as possible by increasing tire track width, and that you equip the vehicle with a functional roll bar and cage system. Wear seat belts and shoulder harnesses at all times, and avoid situations where a side rollover may occur.

E4-WM5-Y698A00 MOUNTING INSTRUCTION



Instructions for disassembly of OE shock absorber module:

- A. Remove the existing shock and spring unit from the vehicle following all procedures in the vehicle manufacturer's service manual.
- B. Note the clocking of the lower T bar mount relative to the studs and pin on the upper mount as shown in Figure 1 (important for reassembly).

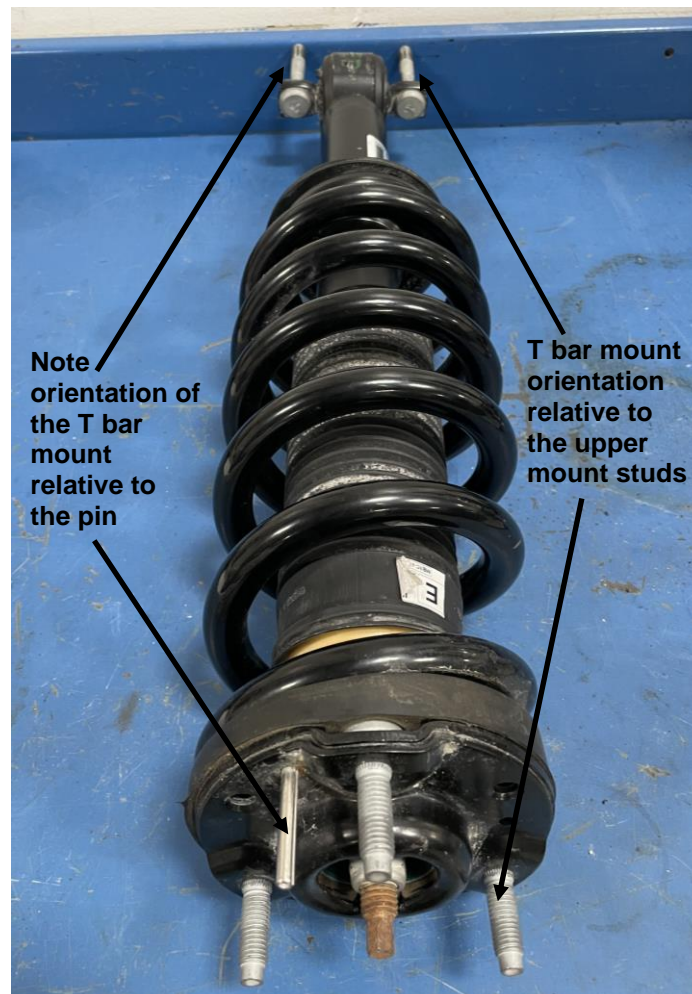

**Figure 1: OEM T Bar/spring clocking.
Damper module depicted above is without
Badlands trim level or Sasquatch package**

- C. Using an appropriate spring compressor, compress the spring until it can be rotated freely by hand. Then, disassemble the shock and spring unit.
- D. Remove the bump cap from the OEM damper in order to disassemble the OEM spring seat and OEM spring seat isolator.

E4-WM5-Y698A00 MOUNTING INSTRUCTION




Instructions for assembly of Bilstein B8 5100 Series shock absorber module:

NOTE: THE INSTALLATION PROCESS IS DIFFERENT DEPENDING ON YOUR TRIM LEVEL AND PACKAGE. READ INSTRUCTIONS CAREFULLY.

- E. If your vehicle is **NOT a Badlands trim level/not equipped with the Sasquatch package** (does not come from the factory with yellow Bilstein ESCV shocks), **install the supplied spring seat adapter**. Orient the spring seat adapter in the direction shown only.

If your vehicle is **a Badlands trim level or equipped with the Sasquatch package** (comes from the factory with yellow Bilstein ESCV shocks), **DO NOT use the supplied spring seat adapter**.

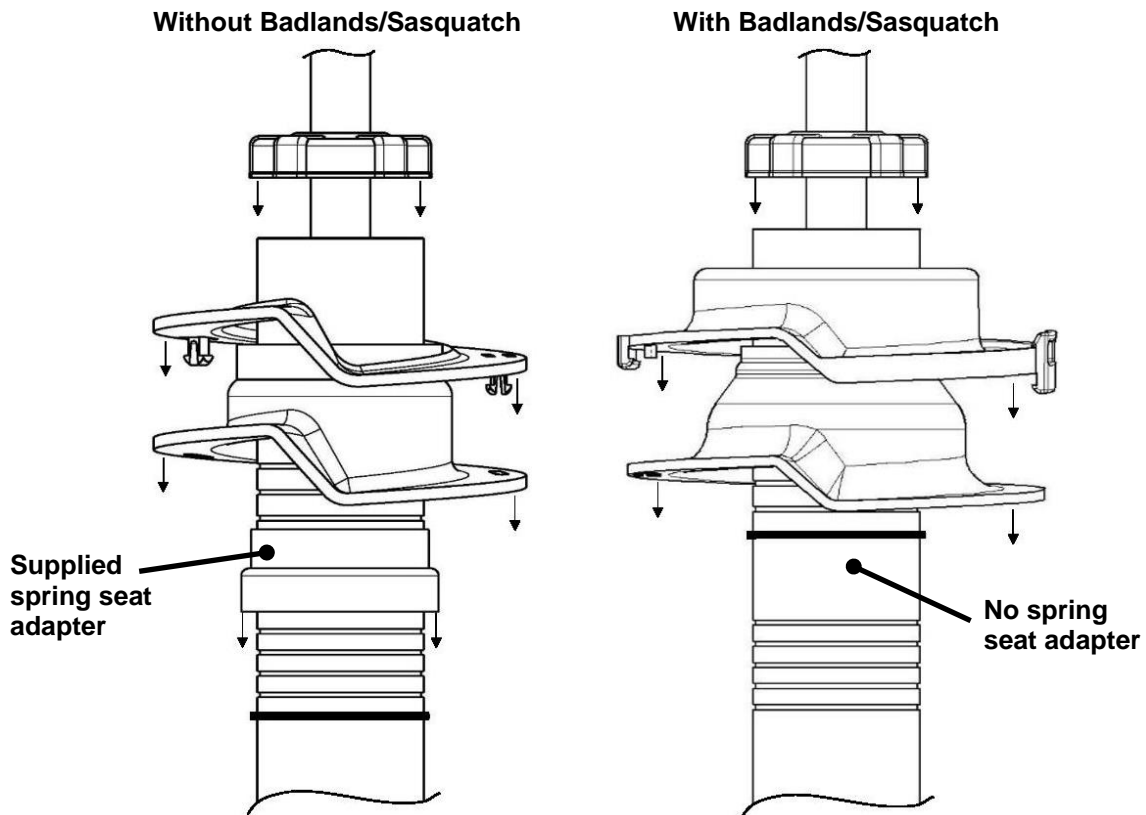


- F. Install the OEM spring seat and OEM spring seat isolator onto the new Bilstein shock body as shown. Orient the spring seat and spring seat isolator in the direction shown only. Ensure that the groove inside the spring seat (or spring seat adapter for vehicles that are not a Badlands trim level/not equipped with the Sasquatch package) fits over the circlip on the shock body [see page 2 (DETAIL A and B)]. Improper installation will cause permanent damage to the shock.
- G. Install the supplied bump stop cap onto the shock body as shown in Figure 4.
- H. Using an appropriate spring compressor, compress the OEM spring and assemble it with the new Bilstein shock. Ensure that the OEM coil spring is installed in the direction shown only. Refer to Figure 1 and Figure 4.

E4-WM5-Y698A00 MOUNTING INSTRUCTION




- I. Install the OEM jounce bumper and OEM dust boot followed by the OEM top hat assembly (which includes the OEM top mount plate and OEM top mount spring isolator) over the threaded stem on the new Bilstein shock and on top of the spring. Refer to Figure 4.

NOTE: DO NOT use the OEM rod collar on the new Bilstein 5100 shock, refer to Figure 2.

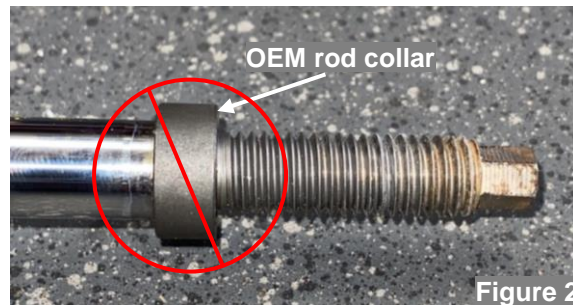

- J. Rotate the coil spring until the end of the top coil is seated into the OEM top mount spring isolator as shown in Figure 3.
- K. Rotate the shock so the lower T bar mount is aligned with the upper mount studs as noted in step B and shown in Figure 1.
- L. Install the provided new flange lock nut and tighten to 45 Nm (34 lb/ft).
******DO NOT USE AN IMPACT WRENCH TO TIGHTEN THE LOCK NUT! ******
- M. Release the spring compressor while ensuring that the end of the top coil remains seated in the OEM top hat assembly.
- N. Install the assembly on to the vehicle and tighten all fasteners to the vehicle manufacturer's specifications- with exception to the lower T bar bolts. Install the supplied lower T bar bolts down through the T bar and control arm. Then install the Bilstein supplied flange lock nuts on to the supplied T-Bar bolts and tighten the lock nuts to 90 Nm (66 lb/ft). Do not re-use the original lock nuts or T bar bolts. This completes the installation.
- O. Check wheel alignment. If necessary, adjust to the vehicle manufacturer's specifications.

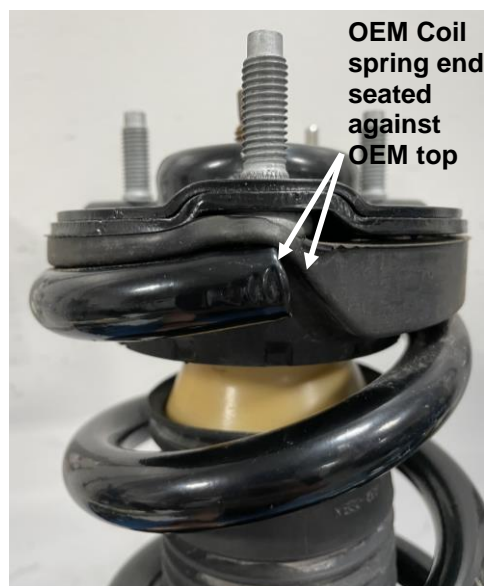

**Figure 3: OEM Coil spring clocking.
Damper module depicted above is without
Badlands trim level or Sasquatch package**

E4-WM5-Y698A00 MOUNTING INSTRUCTION

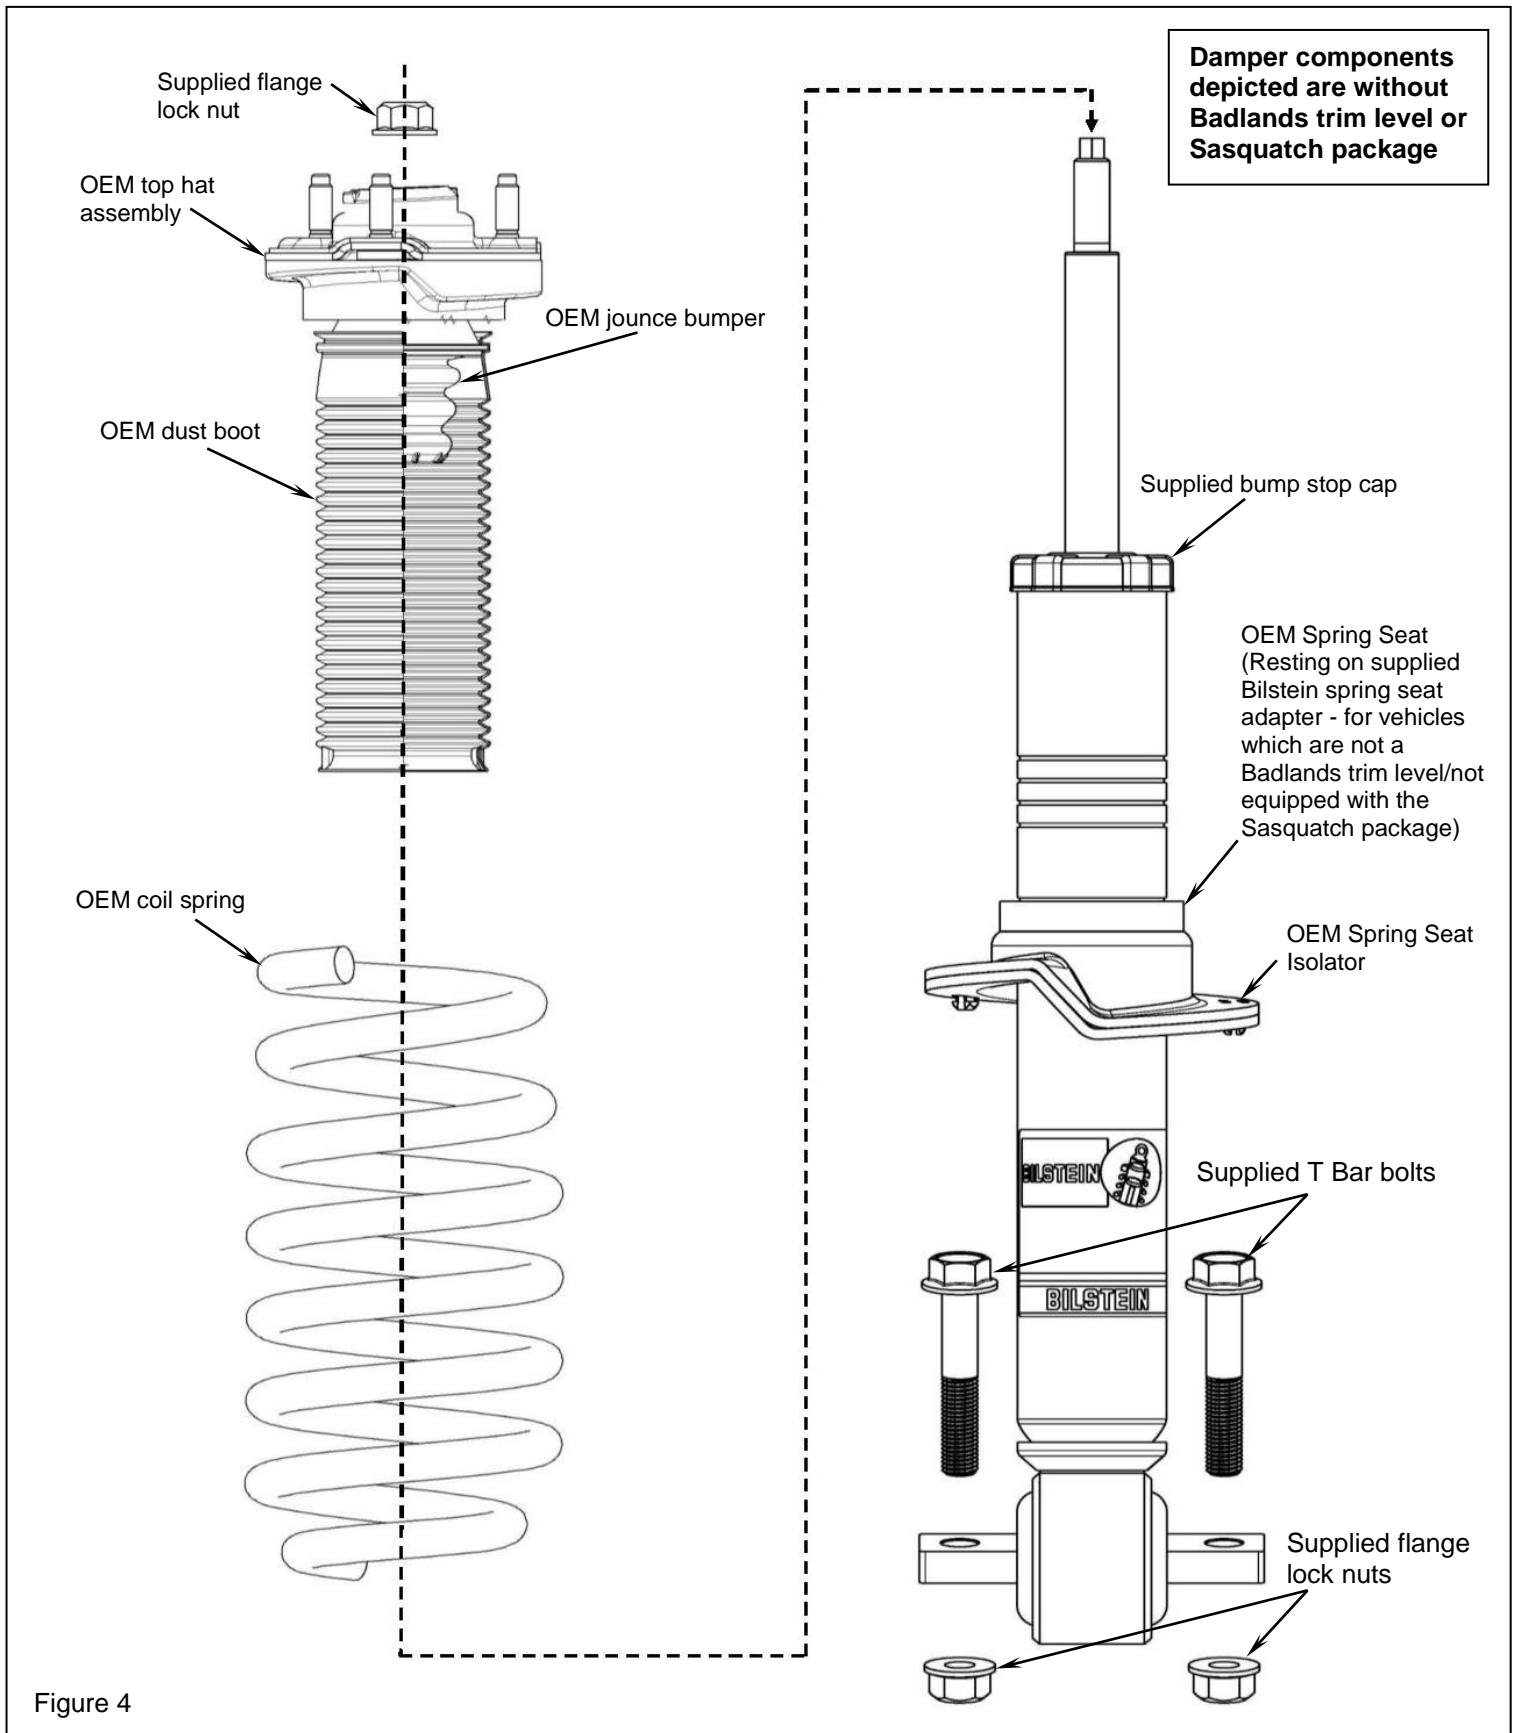


Figure 4

E4-WM5-Y699A00

MOUNTING INSTRUCTION



IMPORTANT! READ THIS FIRST!

Installation of shock absorbers or other suspension components requires special tools and expert knowledge. Accordingly, installation of all BILSTEIN products must be performed by a professional automotive suspension technician.

When replacing other brands, BILSTEIN shock absorbers or other suspension components should always be installed as a set. All BILSTEIN products must only be used for the specific, intended application as indicated in the application guide. **Any use of any BILSTEIN product other than for its intended use may result in serious bodily injury or death.**

Always use a chassis hoist for the installation of BILSTEIN products and make certain that the raised vehicle is securely attached to the hoist and/or supported to prevent the vehicle from slipping, falling, or moving during the installation process.

If you install any BILSTEIN product without the necessary special tools, expertise, and chassis hoist, you may subject yourself to the risk of serious bodily injury or death.

BILSTEIN shock absorbers are gas-filled and are highly pressurized.

- Never place any BILSTEIN shock absorbers in a vise or use a clamp on any BILSTEIN shock absorber.
- Never apply heat near any BILSTEIN shock absorber.
- Never attempt to open or repair any BILSTEIN product, in order to prevent **serious bodily injury or death.**

Any attempt to misuse, misapply, modify, or tamper with any BILSTEIN suspension product voids any warranty and **may result in serious bodily injury or death.**

While installing any BILSTEIN product:

- Do not use impact tools for loosening or tightening fasteners, because this may destroy the screw threads.
- Self-locking fasteners must only be used **once!**
- Reuse original equipment components only if they are in good condition, otherwise replace them with new components.
- Never remove the slight film of oil on the shock absorber piston rod and seal.
- All mounting fasteners for shock absorbers and other suspension components must be securely tightened before tension is placed on the suspension system, unless otherwise specified in the manufacturer's service manual or in this instruction.

After installing any BILSTEIN product:

- The suspension caster and camber must be checked and/or adjusted to comply with the vehicle manufacturer's specifications.
- The (load dependent) brake compensator and the anti-lock brake system must be checked and/or reset to comply with the vehicle manufacturer's specifications.
- The headlight aim must be checked and adjusted.

CAUTION for COILOVER TYPE SUSPENSIONS!!!

If disassembling a coilover type suspension, refer to the vehicle manufacturer's service manual for proper procedures. The coil spring is preloaded and must be compressed with a spring compressor to release load before the upper mount is disassembled. Failure to follow the vehicle manufacturer's procedures may cause serious injury or death, and may damage the vehicle.

IMPORTANT!!!

This BILSTEIN product may or may not be compatible with non-BILSTEIN aftermarket products and/or vehicle modifications. It is the responsibility of the professional automotive suspension technician performing the installation to identify any non-OEM components and/or modifications on the vehicle that may interact with the suspension system. These must be evaluated for any potential physical static or dynamic interference with and/or effect on the function of this BILSTEIN product.


E4-WM5-Y699A00 MOUNTING INSTRUCTION



IMPORTANT:

PLACE CIRCLIP IN APPROPRIATE GROOVE TO ADJUST RIDE HEIGHT.

Use appropriate tools to move the circlip. Ensure that the circlip is fully seated in the groove after moving it (you should be able to rotate it manually in the groove). Install the spring seat and, if applicable, spring seat adapter (in the direction shown only). The circlip must fit completely in the groove inside the spring seat or spring seat adapter (DETAIL A and B). **Improper installation will cause permanent damage to the shock!**

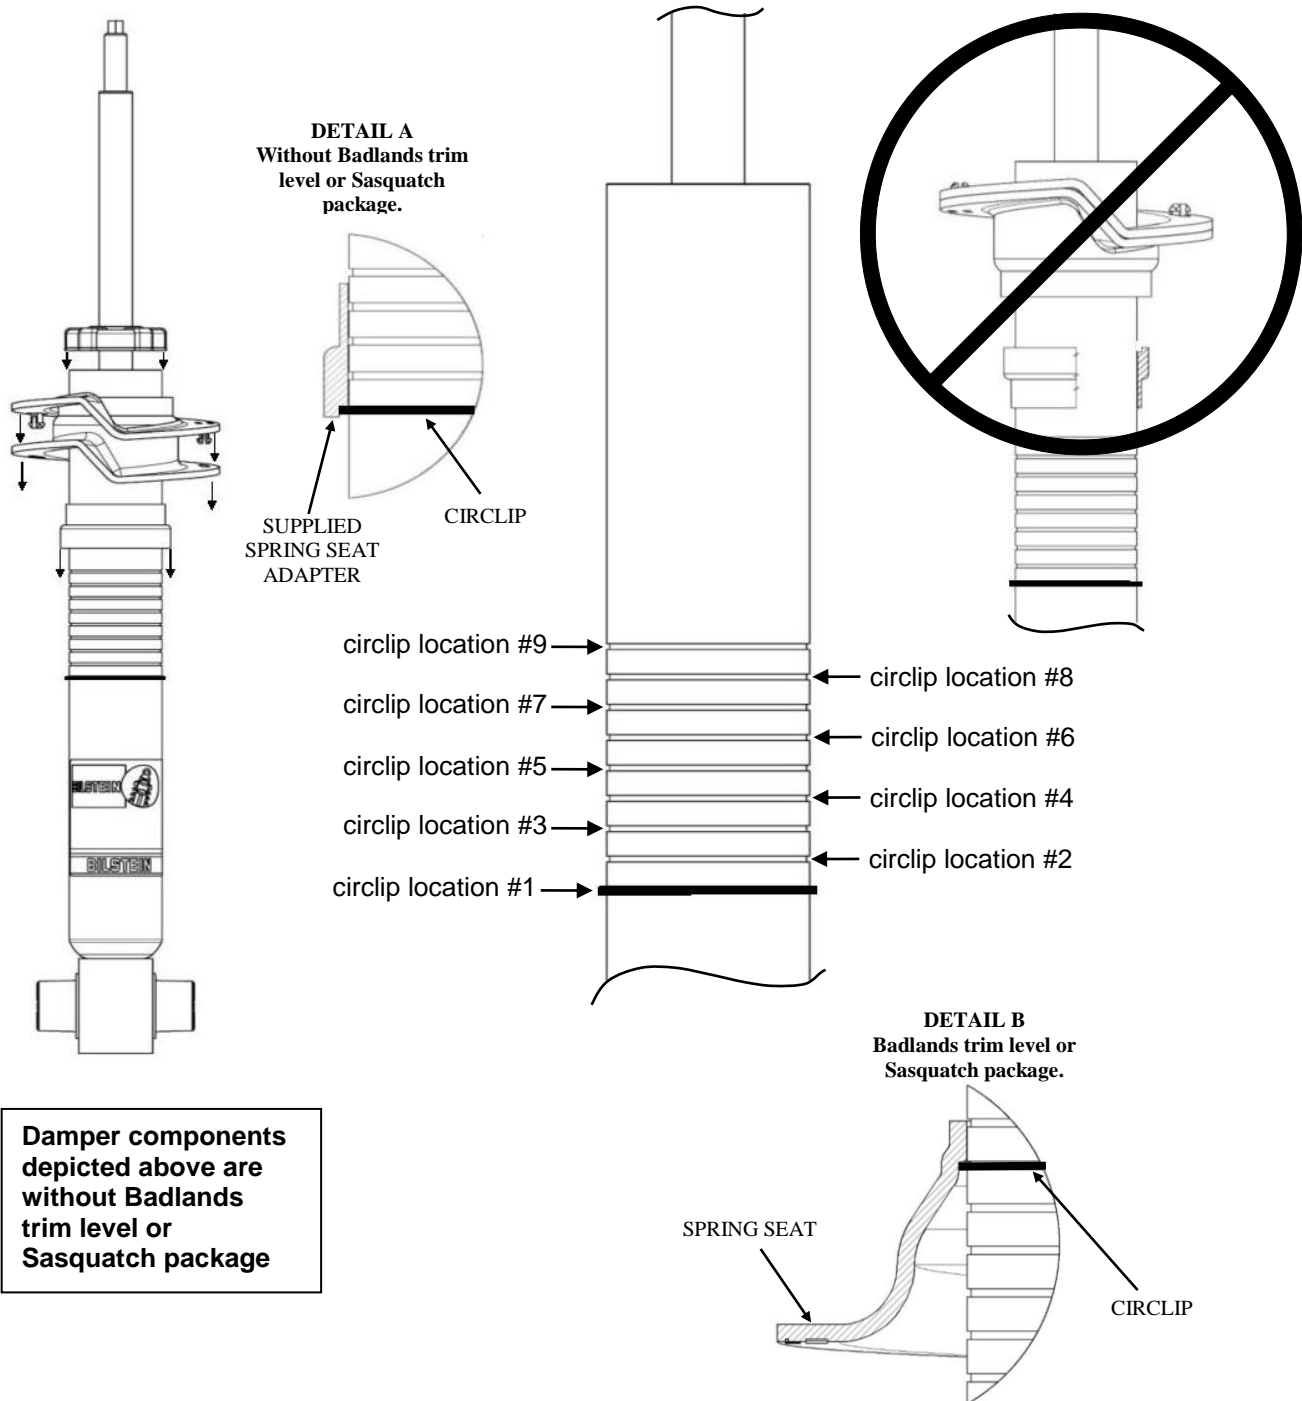

Damper components depicted above are without Badlands trim level or Sasquatch package

E4-WM5-Y699A00 MOUNTING INSTRUCTION



B8 5100 Typical Lift Heights**			
Circlip Location	Without Sasquatch package Vehicles NOT equipped with factory yellow Bilstein ESCV shocks.	Badlands trim level Note: Do not use supplied spring seat adapter.	With Sasquatch package Note: Do not use supplied spring seat adapter.
#9	Do not use	1.7"	1.4"
#8	Do not use	1.2"	0.9"
#7	Do not use	0.7"	0.4"
#6	Do not use	0.3"	Stock
#5	2.5"	Do not use	Do not use
#4	2.1"	Do not use	Do not use
#3	1.75"	Do not use	Do not use
#2	1.4"	Do not use	Do not use
#1	1.0"	Do not use	Do not use

DO NOT USE CIRCLIP SETTINGS THAT ARE NOT RECOMMENDED FOR YOUR VEHICLE.


** Ride heights indicated are typical. Actual ride height is influenced by which factory suspension the vehicle is equipped with and its condition; optional equipment and accessories on your vehicle, and other vehicle modifications such as replacement coil springs, wheel and tire combinations, etc. Modifying/lifting the suspension to your vehicle may raise its center of gravity and may make it more susceptible to loss of control and/or rollover, which may result in death or serious injury. We strongly recommend that you offset the loss of rollover resistance as much as possible by increasing tire track width, and that you equip the vehicle with a functional roll bar and cage system. Wear seat belts and shoulder harnesses at all times, and avoid situations where a side rollover may occur.

E4-WM5-Y699A00 MOUNTING INSTRUCTION



Instructions for disassembly of OE shock absorber module:

- A. Remove the existing shock and spring unit from the vehicle following all procedures in the vehicle manufacturer's service manual.
- B. Note the lower bushing orientation relative to the studs and pin on the upper mount as shown in Figure 1 (important for reassembly).

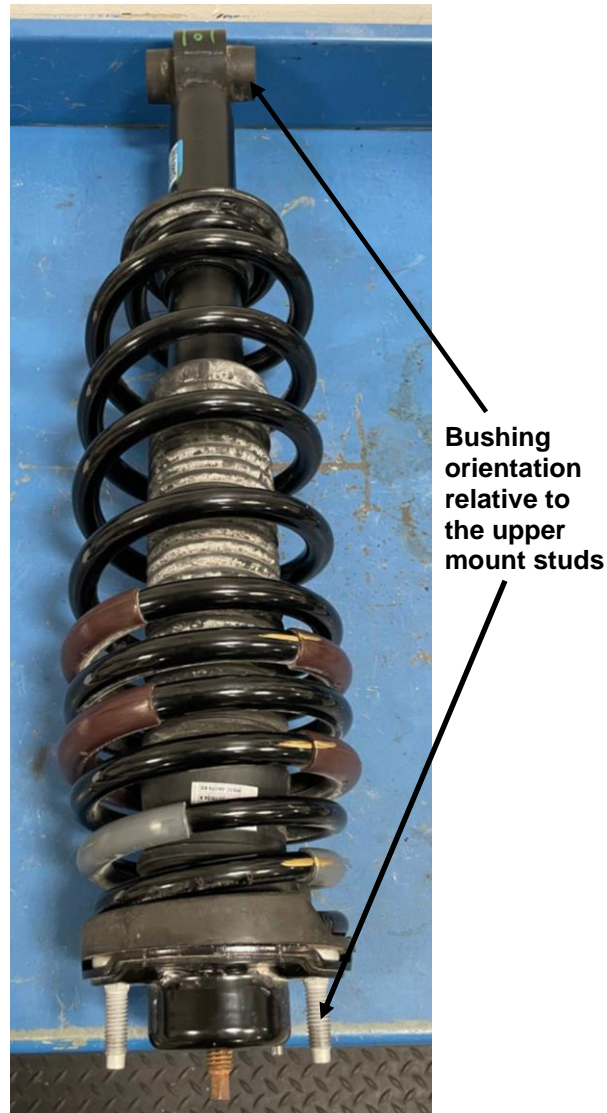

**Figure 1: OEM Bushing/spring clocking
Damper module depicted above is without
Badlands trim level or Sasquatch package**

- C. Using an appropriate spring compressor, compress the spring until it can be rotated freely by hand. Then, disassemble the shock and spring unit.
- D. Remove the bump cap from the OEM damper in order to disassemble the OEM spring seat and OEM spring seat isolator.

E4-WM5-Y699A00 MOUNTING INSTRUCTION




Instructions for assembly of Bilstein B8 5100 Series shock absorber module:

NOTE: THE INSTALLATION PROCESS IS DIFFERENT DEPENDING ON YOUR TRIM LEVEL AND PACKAGE. READ INSTRUCTIONS CAREFULLY.

- E. If your vehicle is **NOT a Badlands trim level/not equipped with the Sasquatch package** (does not come from the factory with yellow Bilstein ESCV shocks), **install the supplied spring seat adapter**. Orient the spring seat adapter in the direction shown only.

If your vehicle is **a Badlands trim level or equipped with the Sasquatch package** (comes from the factory with yellow Bilstein ESCV shocks), **DO NOT use the supplied spring seat adapter**.

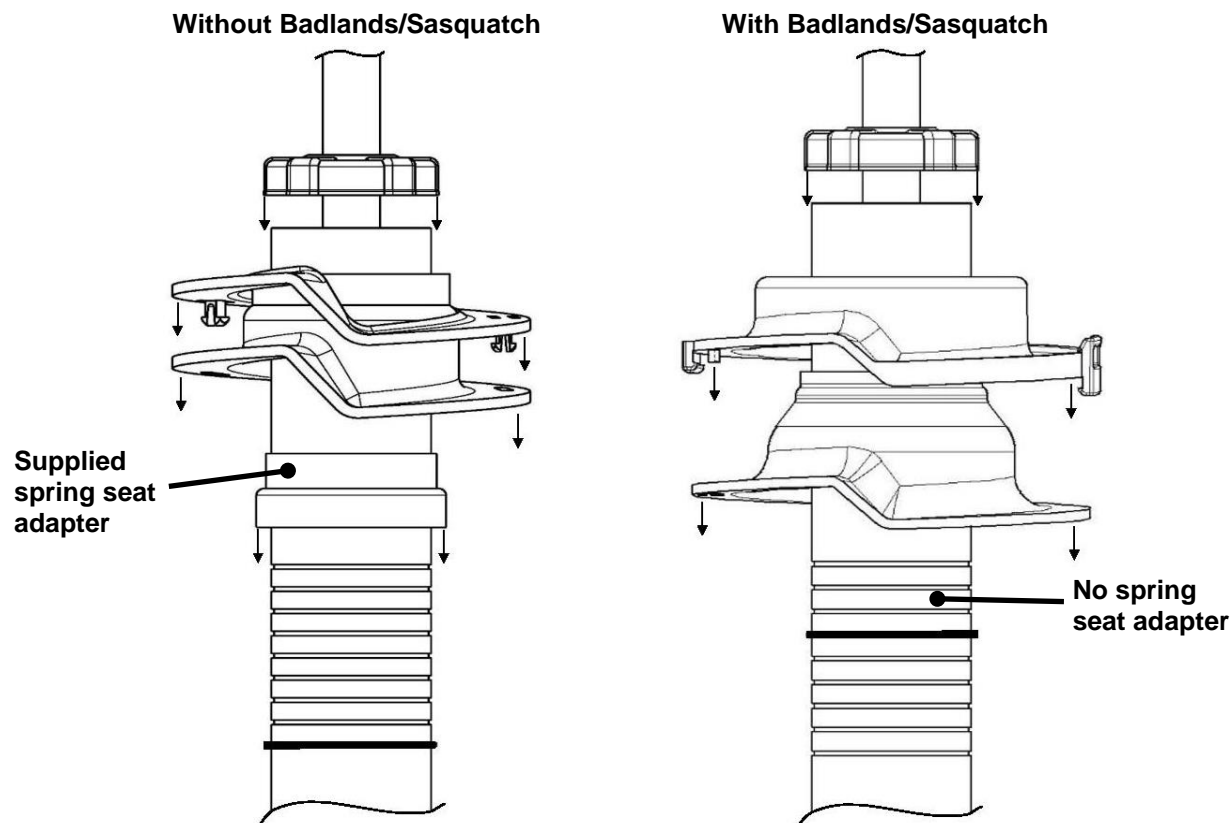


- F. Install the OEM spring seat and OEM spring seat isolator onto the new Bilstein shock body as shown. Orient the spring seat and spring seat isolator in the direction shown only. Ensure that the groove inside the spring seat (or spring seat adapter for vehicles that are not a Badlands trim level/not equipped with the Sasquatch package) fits over the circlip on the shock body [see page 2 (DETAIL A and B)]. Improper installation will cause permanent damage to the shock.
- G. Install the supplied bump stop cap onto the shock body as shown in Figure 4.
- H. Using an appropriate spring compressor, compress the OEM spring and assemble it with the new Bilstein shock. Ensure that the OEM coil spring is installed in the direction shown only. Refer to Figure 1.

E4-WM5-Y699A00 MOUNTING INSTRUCTION



- I. Install the OEM jounce bumper and OEM dust boot followed by the OEM top hat assembly (which includes the OEM top mount plate and OEM top mount spring isolator) over the threaded stem on the new Bilstein shock and on top of the spring. Refer to Figure 4.

NOTE: DO NOT use the OEM rod collar on the new Bilstein 5100 shock, refer to Figure 2.

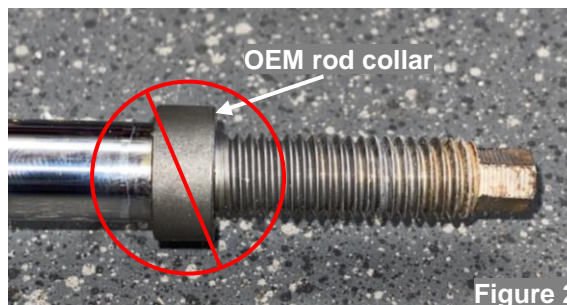

- J. Rotate the coil spring until the end of the top coil is seated into the OEM top mount spring isolator as shown in Figure 3.
- K. Rotate the shock so the lower bushing is aligned with the upper mount studs as noted in step B and shown in Figure 1.
- L. Install the provided new flange lock nut and tighten to 45 Nm (34 lb/ft).
******DO NOT USE AN IMPACT WRENCH TO TIGHTEN THE LOCK NUT! ******
- M. Release the spring compressor while ensuring that the end of the top coil remains seated in the OEM top hat assembly.
- N. Install the assembly on to the vehicle and tighten all fasteners to the vehicle manufacturer's specifications. This completes the installation.
- O. Check wheel alignment. If necessary, adjust to the vehicle manufacturer's specifications.



Figure 3: OEM Coil spring clocking. Damper module depicted above is without Badlands trim level or Sasquatch package

E4-WM5-Y699A00 MOUNTING INSTRUCTION

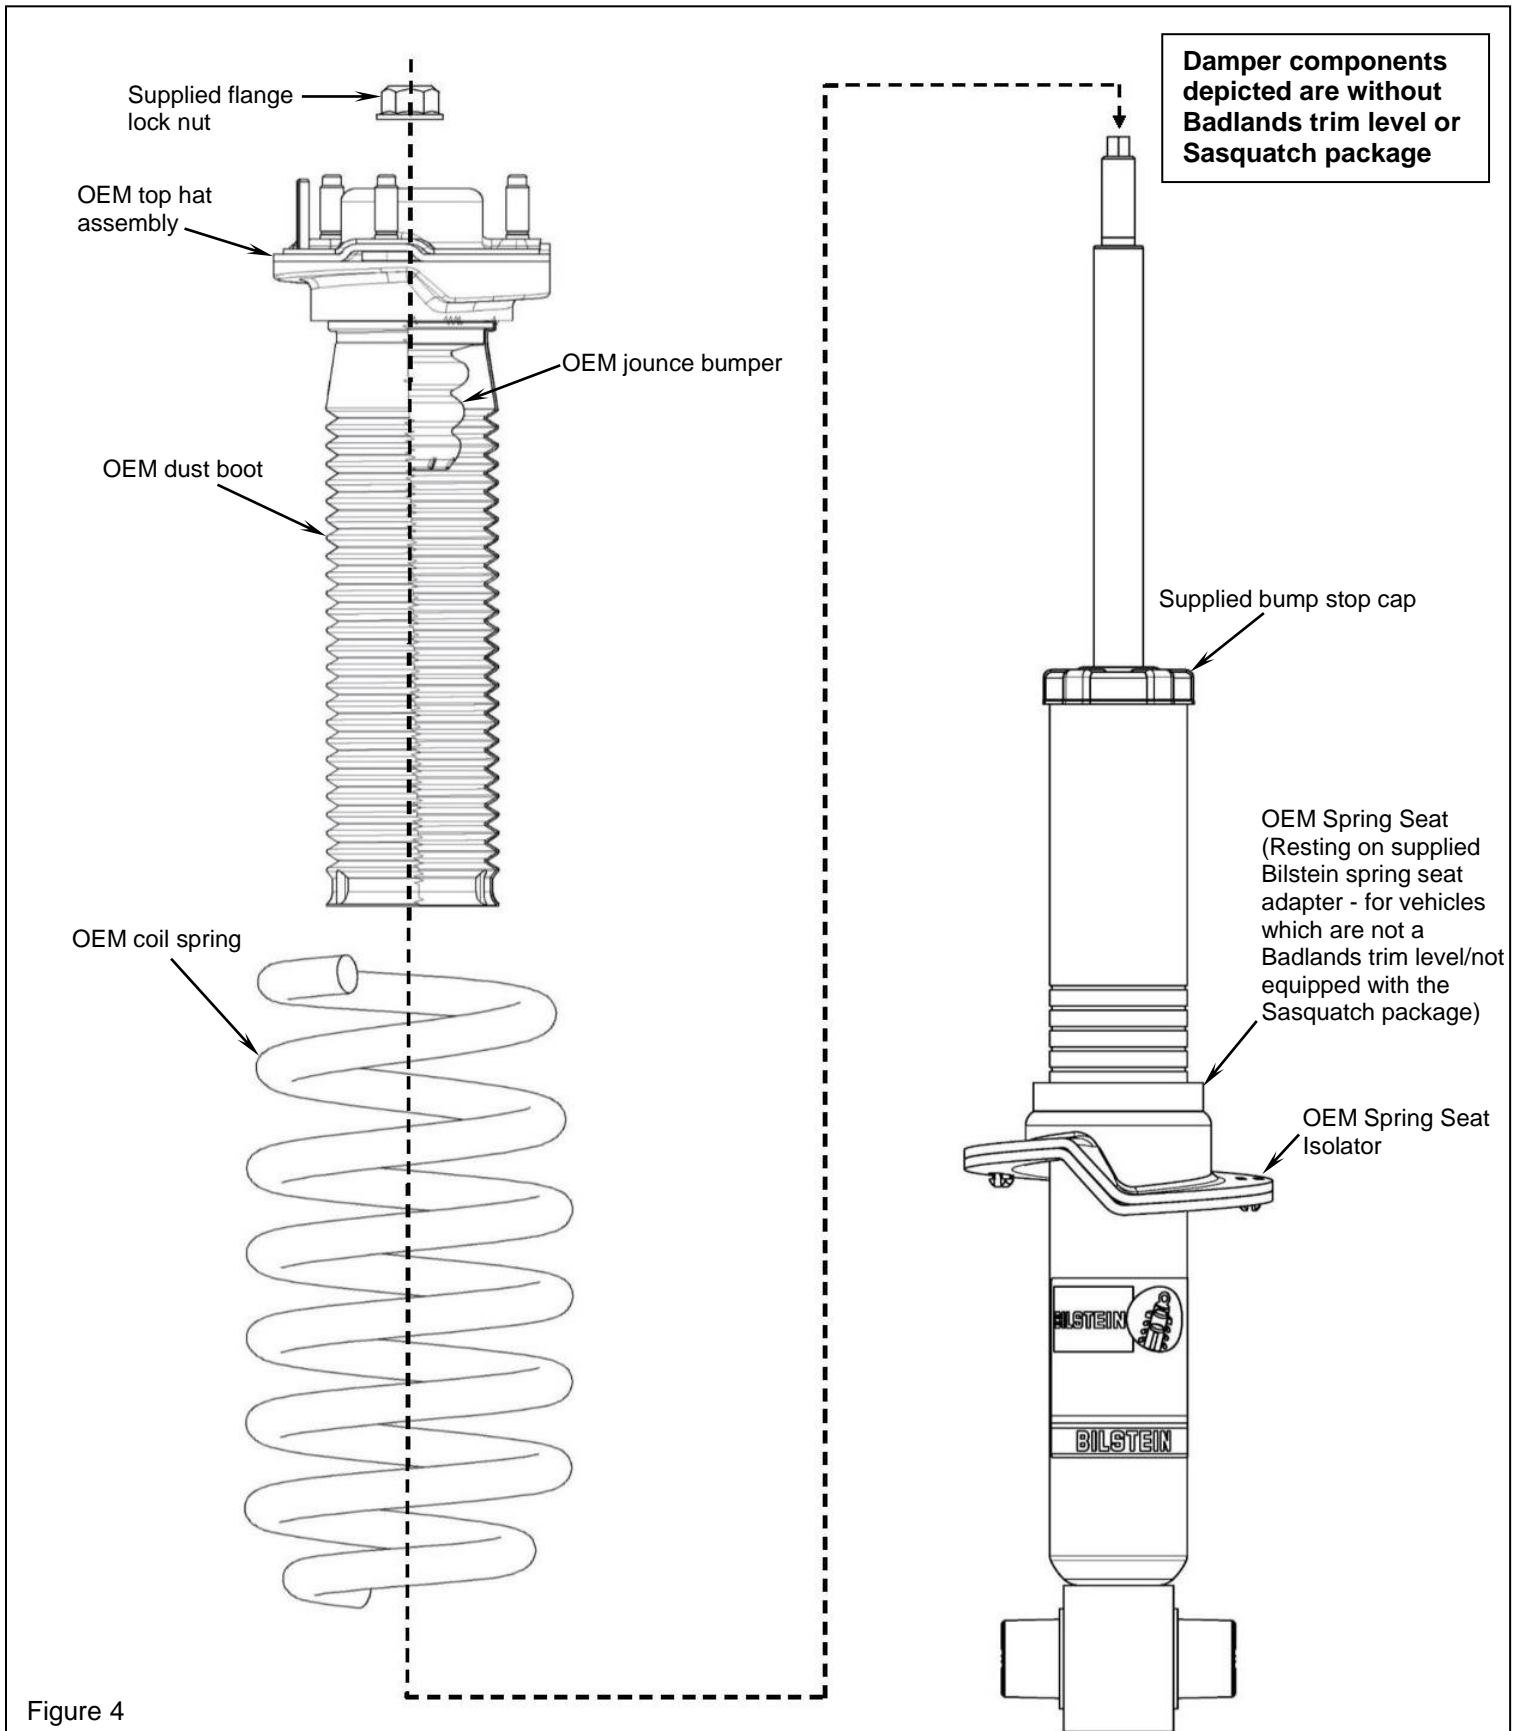


Figure 4