



34935 Flyover Ct. Bakersfield, CA 93308
Phone (866) 426-4648 | Fax (661) 588-8295
WWW.COGNITOMOTORSPORTS.COM

This Cognito product is
protected by Utility Patent
US 7,475,891 B2
All Rights Reserved

INSTALL INSTRUCTIONS:

Cognito Pitman and Idler
Arm Support Kit for 2001-
2010 GM 1500HD/2500/
2500HD/3500/3500HD
2WD/4WD trucks, 2001-2013
GM 2500 2WD/4WD SUVs
and 2003-2009 GM Hummer
H2 and H2 SUVs.
SKU: 110-90715



PARTS LIST FOR SKU: 110-90715

QTY.	PART #	DESCRIPTION
1	8620	Forged Pitman Arm Support Bracket 2001-2010 GM 8-Lug
1	8621	Forged Idler Arm Support Bracket 2001-2010 GM 8-Lug

HP9077 – HARDWARE PACK

QTY.	PART #	DESCRIPTION
2	5402	Steering Nut Course
2	5408	Steering Nut Fine
2	RODEND- CM12T-5/8-18	Rod End CM12T-5/8-18 With F-1 Fit
1	HP9077-1	Hardware Pack Sub Assembly

WARNING

Please read this entire instruction sheet before beginning installation. Proper installation of these components requires a qualified mechanic. Always wear safety glasses when using power tools and take appropriate precautions when working under a vehicle. If these instructions are not properly followed you may jeopardize your, and your passenger's safety, and severe frame, suspension or tire damage may also result from improper installation.

INTRODUCTION

The Cognito Pitman Idler Arm Support Kit prevents unwanted movement of the steering center link, providing a more stable and accurate steering response. This kit is for stock and lifted applications that use factory steering center link in the factory location. Aftermarket steering stabilizers may interfere with this system.

REQUIREMENTS

- Installation requires a qualified mechanic
- Read instructions carefully and study the pictures before attempting installation.
- Retain the removed hardware for reuse.
- 32mm box end wrench, 24mm open end wrench, qty. 2 of $\frac{15}{16}$ " box end wrench, 15mm socket, 21mm deep socket, 21mm end wrench, $\frac{7}{8}$ " socket or box end wrench.


TECHHNICAL INFORMATION

- Check the parts and hardware packages against the parts list to assure that your kit is complete before starting
- Familiarize yourself with instructions before beginning.
- It is necessary to raise the vehicle to perform installation of these products. A hoist or installation bay is recommended. Always ensure the truck is properly supported before attempting installation as serious injury could occur.

INSTALLATION


1. If there is an existing skid plate and shroud at the front cross member of the vehicle, underneath the front of the engine, they should be removed with a 15mm socket to access the pitman and idler arms and set aside for re-installation later.

Figure 1: Skid Plate and Shroud

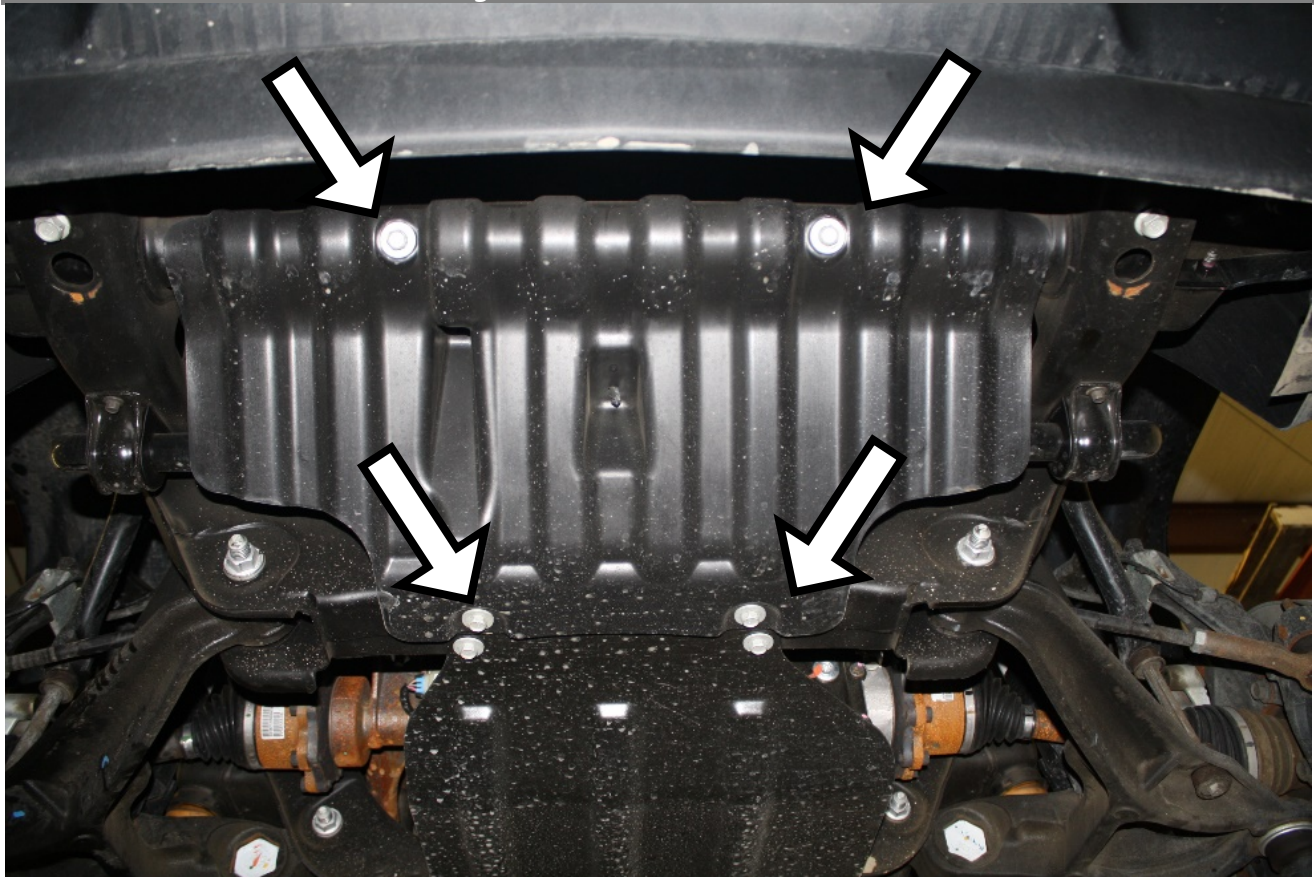


2. Unscrew the factory lock nuts that hold the drag link to the pitman and idler arms, using a 21mm deep socket, and discard them. See figure 2.

Figure 2: Pitman and Idler Arm Nuts

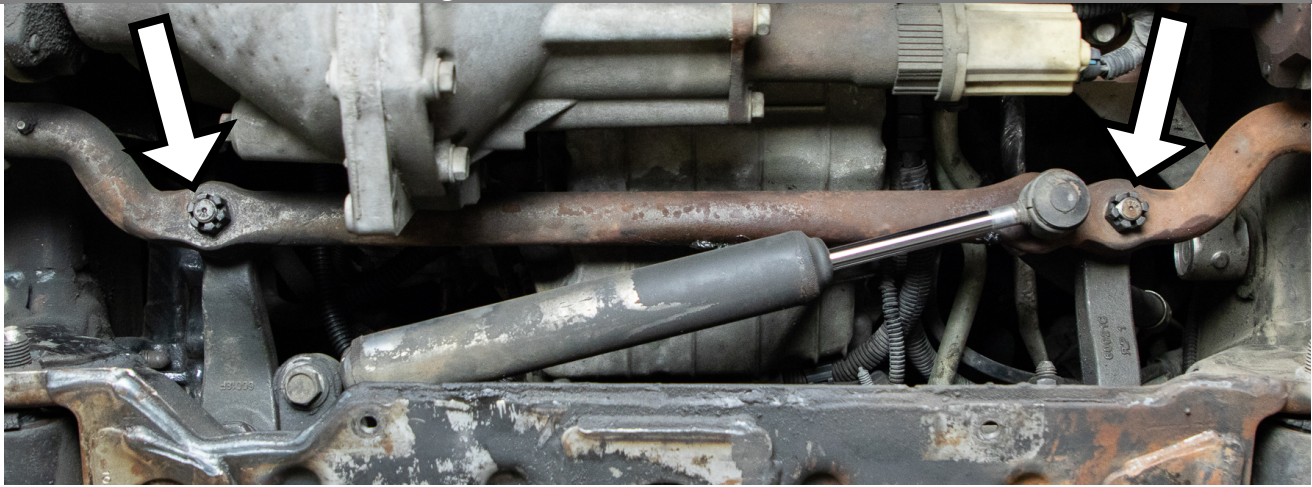


3. Unscrew the large nut holding the pitman (driver's side) arm to the steering box using a 32mm or 1 5/16" boxed end wrench. Remove it and the large lock washer. See figure 3.

Figure 3: Unbolting Pitman Arm Bracket

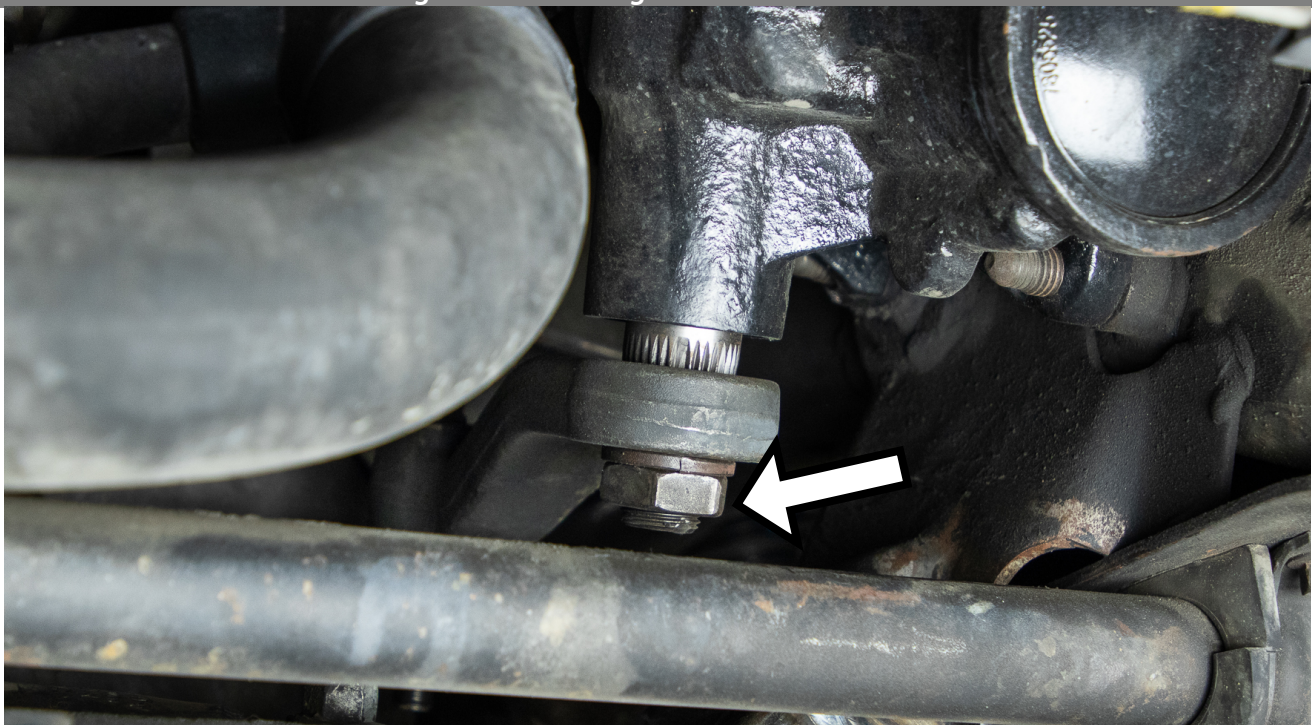

4. Remove the nut holding the idler arm to the idler arm pivot with a 24mm boxed end wrench. On some vehicles, you may have to remove the pivot from the frame because of interference between the frame and idler pivot nut. Use a 21mm socket and wrench to remove these bolts. See figure 4.

Figure 4: Removing the Idler Arm Nut

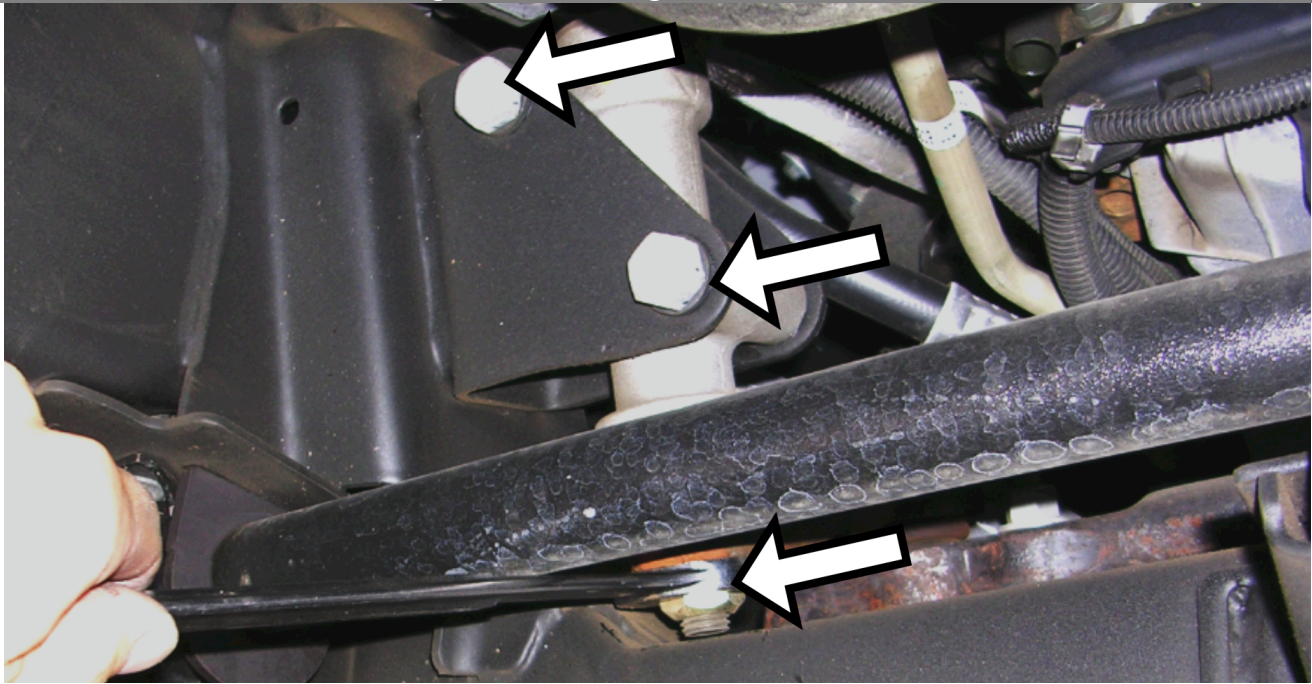

Note: There are two colors of shank nuts included with this kit, gold and silver, which have different thread pitches. Test fit each to determine which shank nut is required for your installation.

Pitman and Idler Brackets



5. **Preform steps 5 and 6 quickly, as the nuts must be tightened before the thread locker dries (Approximately 15 min).** Apply a small amount of red thread locker (included) onto the threads of the rod end, then thread one jam nut all the way onto the rod end. Install the rod end into the pitman arm and loosely install the second jam nut on the other side of the bracket. See figure 5.
6. Apply red thread locker to the inside of the shank nut, then place the lock washer onto the pitman arm stud. Install the pitman arm bracket and rod end, aligning both ends onto their studs, followed by the shank nut. It may be necessary to swivel the ball slightly in order to align both ends. Repeat this process for the idler bracket. Tighten gold shank nuts to 80 Ft.-lbs. Tighten silver shank nuts to 85 Ft.-lbs. Tighten the rod end jam nuts to 90 Ft.-lbs.

Figure 5: Installing Pitman Arm Support Bracket onto Pitman Arm

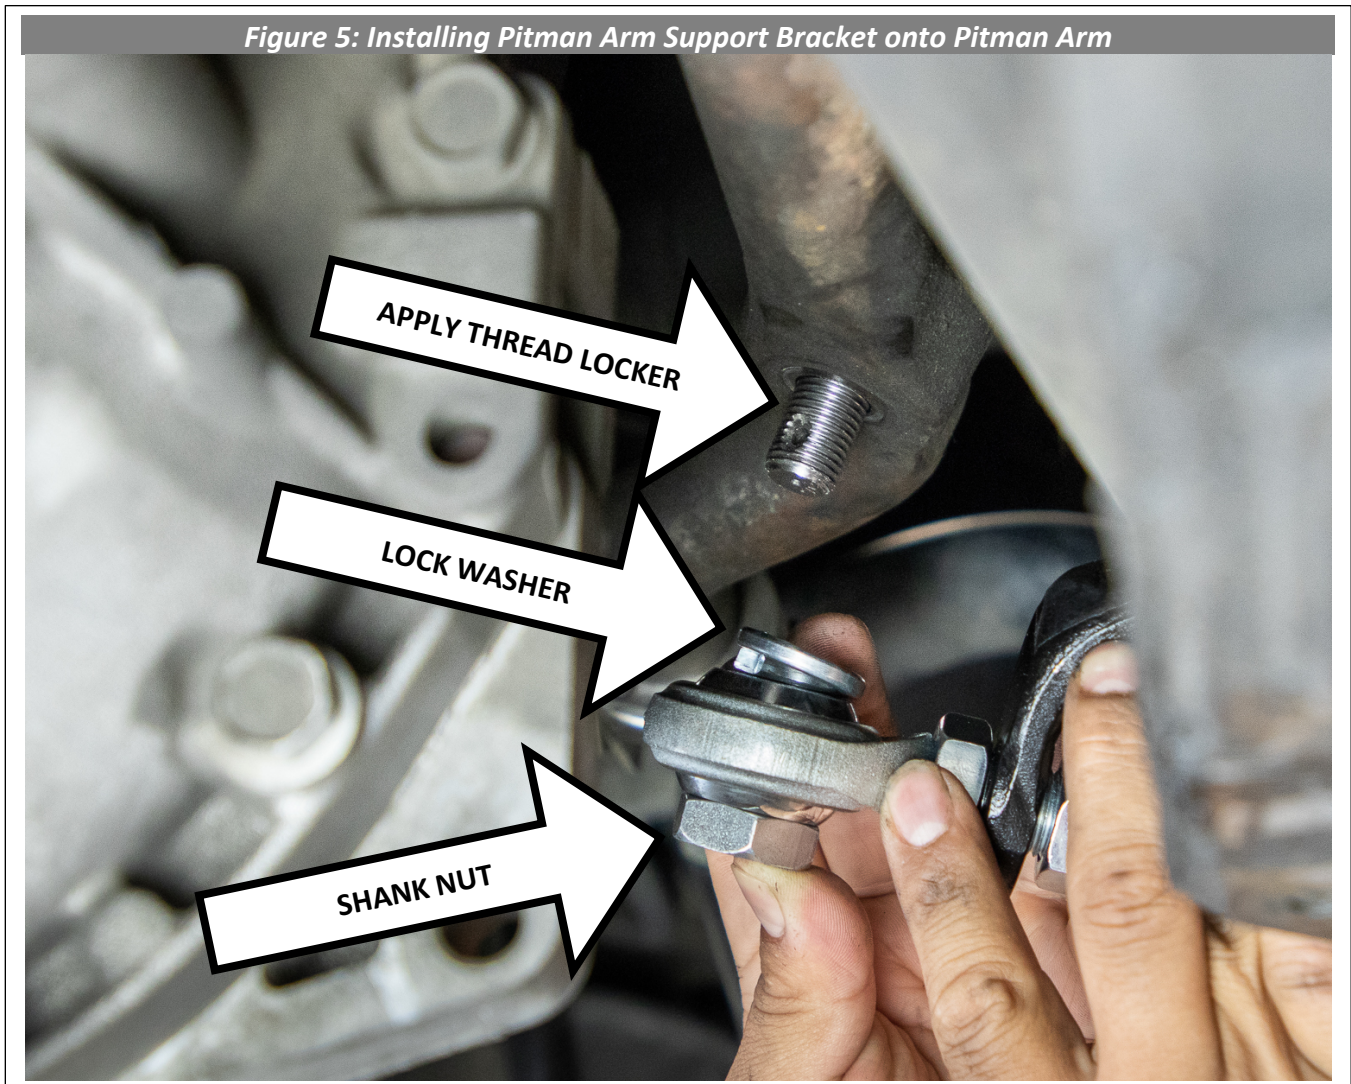



Figure 6: Pitman Arm Bracket Installed




Figure 7: Idler Arm Bracket Installed



7. Tighten the idler pivot nut to 85 Ft.-lbs. before reinstalling the idler pivot into it's frame mounting pocket. Reinstall the two bolts and tighten to 78 Ft.-lbs.

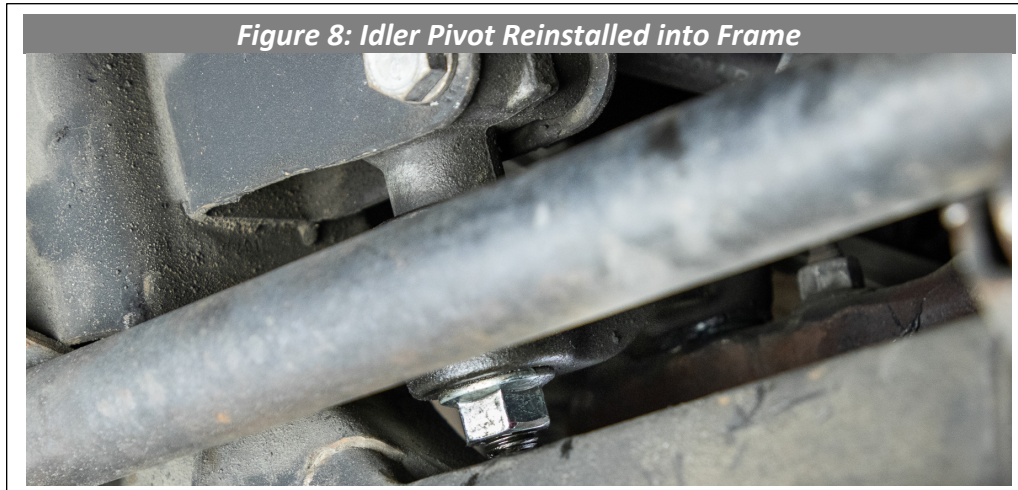

8. Tighten the pitman arm to steering box nut to 184 Ft.-lbs. As there is no access for a torque wrench, use a long 32mm box-end wrench and tighten the nut as much as possible.

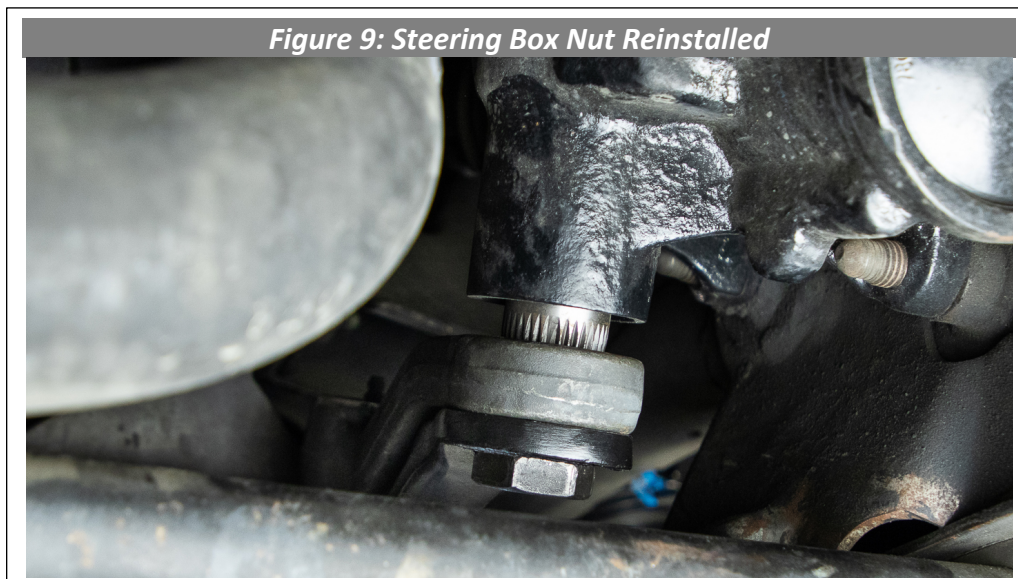

9. If using a factory or aftermarket steering stabilizer, be sure to cycle the steering before driving to ensure clearance at the steering stabilizer shock area.
10. Reinstall the skidplate and fan shroud, tightening fasteners to 40 Ft.-lbs.

Note: A toe setting alignment may be needed.

WARRANTY / RETURN POLICY / SAFETY

Cognito Limited Lifetime Warranty

Cognito Motorsports, Inc. hereinafter “Cognito,” warrants to the original retail purchaser, that its suspension products are free from workmanship and material defects for as long as the purchaser owns the vehicle on which the product(s) were originally installed. This warranty will be void if any modifications are made to the components, including alterations to the surface finish, i.e.; painting, powder coating, plating, and/or welding, or if they are improperly installed. Cognito truck suspension products are not designed nor intended to be installed on “competition” vehicles used in race applications, stunt or for exhibition purposes that are outside of the intended operating conditions specified by the manufacturer. Racing and competition are defined as any contests between two or more vehicles; or vehicles competing individually on off road circuits in timed events (whether or not such contests are for an award or prize).

This warranty does not include coverage for police, taxi, government or commercial vehicles, and the warranty does not cover Cognito products sold outside of the USA. Cognito’s obligations under this warranty are specified and applied at its sole discretion, and warranty coverage is limited to repair or replacement of the defective product(s). Any and all costs of removal, installation or reinstallation; freight charges, incidental or consequential damages associated with the covered products are expressly excluded from this warranty.

The following items are exempt from Cognito limited warranty coverage: bushings, bump stops, tie-rod ends (Heim joints) and limiting straps. These parts are “consumables” and designed to wear as a normal part of their duty cycle, therefore they are not considered defective when worn. The aforementioned products are warranted separately against defects in workmanship, for 60 days from the date of purchase. As a condition of warranty validation, respective Cognito suspension components must be installed as a complete system (not combined with non-Cognito hardware or ancillary parts). Any substitutions or omission of required components will void the warranty. Some minor cosmetic wear and imperfections may occur to parts during shipping, which is not covered under this warranty. This limited warranty does not apply to any components that have been subjected to collision damage, negligence, alteration, abuse, or misuse, and coverage does not extend to products manufactured by third-party companies. Cognito reserves the right to supersede, discontinue, or change the design, finish, part number and/or application of its parts when deemed necessary, without notice.

Return Policy

Product returns will not be accepted without prior written approval from an authorized Cognito representative. All products being returned must be shipped via trackable, prepaid freight. Returned products are subject to a 25% percent restocking fee. The eligible return period for products purchased directly from Cognito is 30 days from the verified date when the product(s) were originally received by the purchaser.

Product Safety Advisory

The installation of Cognito steering and suspension components will modify your vehicle’s original factory equipment and geometry, which may cause it to handle differently than a stock (unaltered) vehicle. Installation of these components is not intended to strengthen nor reinforce the vehicle’s frame, nor are they designed to increase rollover protection. It is necessary to periodically inspect all suspension and drive train components for proper attachment, torque specifications, operation, and for any potential unusual wear or damage. Installation of these parts will modify the height of the vehicle and may raise the center of gravity. Modifying vehicle height combined with off road operation may increase your vehicle’s susceptibility to rollover conditions, which may cause serious injury or death. Many states regulate allowable vehicle height modifications, and it is your responsibility to know and comply with the legal requirements specified by the laws where you reside. Modifications to your vehicle’s ride height may also affect the ride quality, driver input response, trackability and handling, and wear to your vehicle’s suspension components and tires.